

# BOBCAT COMPANY PRICE PAGES

## NA Telehandler



### Please note the following when using Bobcat Price Pages:

- All prices are shown in U.S. dollars.
- Check DealerNET Pricing Homepage for current Canadian exchange rate.
- For current Dealer Installed Accessories pricing, reference Quote & Order or Dealer Parts Department.
- Prices and specifications are subject to change without notice.

### THE FOLLOWING UPDATES HAVE BEEN MADE TO THIS DOCUMENT:

| Date      | Description of Change                                                          |
|-----------|--------------------------------------------------------------------------------|
| 6/18/2021 | Bobcat Company has adjusted the SLP of select power units                      |
| 9/27/2021 | Updated Dealer Installed Accessories                                           |
| 11/1/2021 | Bobcat Company has adjusted the SLP of select power units                      |
| 2/7/2022  | Bobcat Company has adjusted the SLP of select power units                      |
| 1/2/2023  | Bobcat Company has adjusted the SLP of select power units and release of TL519 |
| 5/1/2023  | Addition of TL619 Power Bobtach Package                                        |
| 6/30/2023 | Bobcat Company has adjusted the SLP of select power units                      |
| 1/1/2024  | AOP Price Adjustments                                                          |
| 8/1/2024  | Discontinued TL619, introduction of TL623                                      |
| 1/1/2025  | AOP Price Adjustments                                                          |
| 6/16/2025 | Discontinued TL923, introduction of TL923 V-Drive                              |
| 1/1/2026  | AOP Price Adjustments                                                          |

*\*Certain Specification(s) are based on engineering calculations and are not actual measurements. Specification(s) are provided for comparison purposes only and are subject to change without notice. Specification(s) for your individual Bobcat equipment will vary based on normal variations in design, manufacturing, operating conditions, and other factors.*

## TL519 Telehandler



### Standard Equipment

74 HP Tier 4 Non DPF Turbocharged Engine  
Attachment Control Device (7 pin)  
Automatic Parking Brake with Slope Assist  
Auxiliary Hydraulics w/ Coupler Release Block  
Back-up Alarm  
Bobcat Standard 5" Display  
Boom Float  
Boom Stop  
Eco Mode  
Enclosed Cab With;  
Heat/Air Conditioning: Parking Brake; Front, Rear, and  
Roof Washer/Wipers; Dome Light; Phone Holder; Power  
Port; Mechanical Suspension Seat; Retractable Seat Belt;  
Tilt and Telescoping Steering; Radio Ready; Sun Visor;  
Fixed Armrest; ACD Keypad  
Front/Four-Wheel/Crab/Semi-Crab Steering  
Hydrostatic Transmission with 2-Speed, Advanced  
Attachment Control, & Flex Drive (Engine Speed Lever)

Hitch: Rear Pin Type  
Instrumentation: Hourmeter, RPM, System Voltage; Engine  
Temperature and Fuel Gauges; Warning Lights  
LED Work Lights  
Road Lights (Halogen):  
Headlights, Turn Signals, Flashers, Tail Lights, Reverse  
Light (RH side), Rear Fog Light (LH side)  
Mirrors: Right & Left Side  
Multi Function Joystick w/ Direction Control  
Power Bob-Tach® Attachment Mounting System  
Reversible Cooling Fan With Manual And Automatic Control  
Rotating Beacon  
Smart Handling System  
Spark Arrestor Exhaust System  
Tires: 12-16.5  
Wheel Fenders  
Warranty: 24 Months Or Total Of 2000 Hours

- 1) Roll Over Protective Structure (ROPS) - ISO 3471 & Falling Object Protective Structure (FOPS) level II – ISO 3449


### Quick Specs

|                                       | <b>TL519</b>      |
|---------------------------------------|-------------------|
| Max Rated Lift Capacity.....          | 5,512 lbs.        |
| Lift Capacity to Max Height.....      | 3,968 lbs.        |
| Engine Make.....                      | Bobcat® Engine    |
| Engine Model.....                     | D24 (Turbo)       |
| Engine Fuel/Cooling.....              | Diesel/Liquid     |
| Engine Tier (EPA).....                | Tier 4            |
| Horsepower .....                      | 74 HP             |
| Displacement.....                     | 146.0 cu in.      |
| Travel Speed I (High/Low).....        | 17.0 / 4.3 MPH    |
| Operating Weight.....                 | 9,936 lbs.        |
| Cab Height w/Beacon.....              | 82.1"             |
| Width (without attachment).....       | 72.1"             |
| Length (Fork Face to Rear Hitch)..... | 157.0"            |
| Wheelbase.....                        | 92.9"             |
| Lift Height.....                      | 232"              |
| Auxiliary Flow/Relief Pressure.....   | 21.1 GPM/3626 PSI |

| Part Number | Description            | Telehandler | SLP in US \$ |
|-------------|------------------------|-------------|--------------|
| M2702       | TL519 Telehandler..... |             | \$112,508    |

| Part Number | Description                                                                                                                                        | Dealer Installed Accessories - Order From Parts | SLP in US \$ |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|--------------|
| 7489831     | Beacon: LED Rotating.....                                                                                                                          |                                                 | \$ _____     |
| 7328972     | Block Heater.....                                                                                                                                  |                                                 | \$ _____     |
|             | Must order Block Heater (includes power cord) w/Ref 4 & 5, and PN 6678668 - Strap x 7.<br>Estimated Installation Time: 1.0 hr                      |                                                 |              |
| 7489887     | Boom Suspension & Float Kit.....                                                                                                                   |                                                 | \$ _____     |
|             | Boom Suspension and Float functions install kit, comes with accumulators and suspension valve.<br>Estimated Installation Time: 2.0 hr              |                                                 |              |
| 7497096     | Boom Work Light Kit (LED).....                                                                                                                     |                                                 | \$ _____     |
|             | Illuminates attachment work area. Mounts on boom. Estimated Installation Time: 0.5 hr                                                              |                                                 |              |
| 46891158    | Digital Radio w/ Hands Free Calling.....                                                                                                           |                                                 | \$ _____     |
|             | DIN style radio. AM/FM. See Parts Dept for alternative radio's. Estimated Installation Time: 0.5 hr                                                |                                                 |              |
| 7187118     | D-Ring Attachment Hose Guide .....                                                                                                                 |                                                 | \$ _____     |
| 7480420     | Dust Protection Kit.....                                                                                                                           |                                                 | \$ _____     |
|             | Kit to help prevent dust and dirt from entering between the fixed boom and the inner boom.<br>Estimated Installation Time: 1.0 hr                  |                                                 |              |
| 7489851     | Easy Greasing Kit.....                                                                                                                             |                                                 | \$ _____     |
|             | Zerks and tubline routings for easier greasing of axles. Estimated Installation Time: 2 hr                                                         |                                                 |              |
| 7450306     | Fire Extinguisher Kit.....                                                                                                                         |                                                 | \$ _____     |
|             | Estimated Installation Time: 0.25 hr                                                                                                               |                                                 |              |
| 7452650     | Front Window Guard Kit.....                                                                                                                        |                                                 | \$ _____     |
|             | Protective grill for front window. Kit increases cab height. Estimated Installation Time: 0.5 hr                                                   |                                                 |              |
| 7453311     | Keyless Start Kit.....                                                                                                                             |                                                 | \$ _____     |
|             | Replaces key with non-keyed switch, security codes are accessed through standard 5" display w/<br>Jog shuttle. Estimated Installation Time: 0.5 hr |                                                 |              |
| 7395953     | NA Telematics-Machine IQ.....                                                                                                                      |                                                 | \$ _____     |
|             | Connected machine capabilities. Estimated Installation Time: 0.5 hr                                                                                |                                                 |              |
| 7489873     | Rear Mirror Kit.....                                                                                                                               |                                                 | \$ _____     |
|             | Flat rear mounted mirror, used to view rear hitch for trailer hook up. Estimated Installation Time:<br>0.5 hr                                      |                                                 |              |
| 7500455     | Rear View Camera.....                                                                                                                              |                                                 | \$ _____     |
|             | Compatible with standard 5" display. Includes camera and harness. Estimated Installation Time:<br>3.0 hr                                           |                                                 |              |
| 7489881     | Suspension Seat, Air Ride.....                                                                                                                     |                                                 | \$ _____     |
|             | Estimated Installation Time: 0.5 hr                                                                                                                |                                                 |              |
| 7489883     | Tool Box.....                                                                                                                                      |                                                 | \$ _____     |
|             | Tool Storage box. Estimated Installation Time: 1.0 hr                                                                                              |                                                 |              |

## TL623 Telehandler

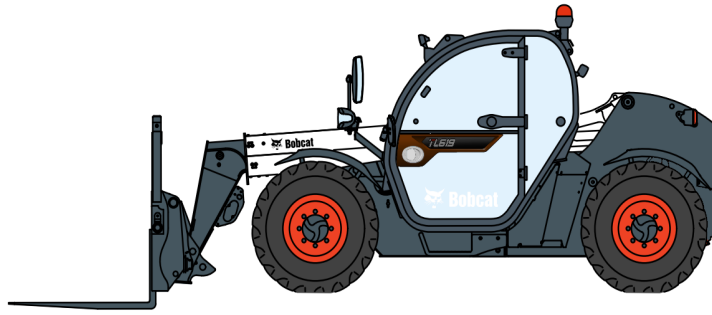

### Standard Equipment

74 Hp Tier 4 Non DPF Turbocharged Engine  
Attachment Control Device (7 pin)  
Automatic Parking Brake with Slope Assist  
Auxiliary Hydraulics W/ Coupler Release Block  
Back-up Alarm  
Bobcat Standard 5" Display  
Power Bob-Tach® Attachment Mounting System  
Auto Boom Suspension  
Boom Stop  
Eco Mode  
Enclosed Cab With;  
Heat/Air Conditioning; Front, Rear, And Roof  
Washer/Wipers; Dome Light; Power Port; Air Ride  
Suspension Seat; Retractable Seat Belt; Tilt And Telescoping  
Steering; Radio Ready; Sun Visor; Fixed Armrest; ACD  
Keypad  
Front/Crab/Four-Wheel Steering  
Hitch, Rear Pin Type

Hydrostatic Transmission  
2-Speed, Advanced Attachment Control, & Flex Drive  
Instrumentation: Hourmeter, RPM, System Voltage; Engine  
Temperature and Fuel Gauges; Warning Lights  
LED Work Lights  
Road Lights (Halogen):  
Headlights, Turn Signals, Flashers, Tail Lights, Reverse Light  
(RH side), Rear Fog Light (LH side)  
Mirrors: Right & Left Side  
Reversible Cooling Fan With Manual And Automatic Control  
Rotating Beacon  
Smart Handling System  
Spark Arrestor Exhaust System  
Tires: 405/70 – 20  
Wheel Fenders  
rant

- 1) Roll Over Protective Structure (ROPS) - ISO 3471 & Falling Object Protective Structure (FOPS) level II – ISO 3449

### Quick Specs

|                                       | <b>TL623</b>      |
|---------------------------------------|-------------------|
| Max Rated Lift Capacity.....          | 6,000 lbs.        |
| Lift Capacity to Max Height.....      | 4,400 lbs.        |
| Engine Make.....                      | Bobcat® Engine    |
| Engine Model.....                     | D34 (Turbo)       |
| Engine Fuel/Cooling.....              | Diesel/Liquid     |
| Engine Tier (EPA).....                | Tier 4            |
| Horsepower .....                      | 74 HP             |
| Displacement.....                     | 208.0 cu in.      |
| Travel Speed I (High/Low).....        | 18.3 / 4.7 MPH    |
| Operating Weight.....                 | 12,191 lbs.       |
| Cab Height w/Beacon.....              | 90.2"             |
| Width (without attachment).....       | 82.7"             |
| Length (Fork Face to Rear Hitch)..... | 196.7"            |
| Wheelbase.....                        | 111.0"            |
| Lift Height.....                      | 264.2"            |
| Auxiliary Flow/Relief Pressure.....   | 21.1 GPM/3626 PSI |

Prices and Specifications

Subject to Change Without Notice

Check DealerNet Pricing Homepage for current Canada exchange rate.

**Telehandler**

All Prices in U.S. Dollars

North American Suggested List Prices

2026 Price Book

Page 4 of 9

| Part Number | Description            | Telehandler | SLP in US \$ |
|-------------|------------------------|-------------|--------------|
| M2771       | TL623 Telehandler..... |             | \$128,818    |

| Part Number | Description                                                                                                                                     | Dealer Installed Accessories - Order From Parts | SLP in US \$ |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|--------------|
| 7322390     | Beacon: LED Flashing.....                                                                                                                       |                                                 | \$ _____     |
|             | Amber, LED flashing beacon mounts to pre-wired socket on cab. Estimated Installation Time: 0.25 hr                                              |                                                 |              |
| 7168492     | Beacon: Rotating.....                                                                                                                           |                                                 | \$ _____     |
|             | Amber, rotating beacon mounts to pre-wired socket on cab. Estimated Installation Time: 0.25 hr                                                  |                                                 |              |
| 7361247     | Block Heater.....                                                                                                                               |                                                 | \$ _____     |
|             | Must order Block Heater (includes power cord) w/Ref 4 & 5, and PN 6678668 - Strap x 7. Estimated Installation Time: 1.0 -3.0 hr                 |                                                 |              |
| 7453953     | Boom Work Light Kit (LED).....                                                                                                                  |                                                 | \$ _____     |
|             | Illuminates attachment work area. Mounts on boom. Estimated Installation Time: 0.5 hr                                                           |                                                 |              |
| 46891158    | Digital Radio w/ Hands Free Calling.....                                                                                                        |                                                 | \$ _____     |
|             | DIN style radio. AM/FM. See Parts Dept for alternative radio's. Estimated Installation Time: 0.5 hr                                             |                                                 |              |
| 7187118     | D-Ring Attachment Hose Guide .....                                                                                                              |                                                 | \$ _____     |
|             | Estimated Installation Time: 0.25 hr                                                                                                            |                                                 |              |
| 7453147     | Dual Direction Selector Kit.....                                                                                                                |                                                 | \$ _____     |
|             | Secondary direction control lever integrated into the steering column. Estimated Installation Time: 0.5 hr                                      |                                                 |              |
| 7277780     | Dust Protection Kit.....                                                                                                                        |                                                 | \$ _____     |
|             | Kit to help prevent dust and dirt from entering between the fixed boom and the inner boom. Estimated Installation Time: 1.0 hr                  |                                                 |              |
| 7497068     | Easy Greasing Kit.....                                                                                                                          |                                                 | \$ _____     |
|             | Zerks and tubline routings for easier greasing of axles, boom cylinders. Estimated Installation Time: 6 hr                                      |                                                 |              |
| 7450306     | Fire Extinguisher Kit.....                                                                                                                      |                                                 | \$ _____     |
|             | Estimated Installation Time: 0.25 hr                                                                                                            |                                                 |              |
| 7452650     | Front Window Guard Kit.....                                                                                                                     |                                                 | \$ _____     |
|             | Protective grill for front window. Kit increases cab height. Estimated Installation Time: 0.5 hr                                                |                                                 |              |
| 7453311     | Keyless Start Kit.....                                                                                                                          |                                                 | \$ _____     |
|             | Replaces key with non-keyed switch, security codes are accessed through standard 5" display w/ Jog shuttle. Estimated Installation Time: 0.5 hr |                                                 |              |
| 7395953     | NA Telematics-Machine IQ.....                                                                                                                   |                                                 | \$ _____     |
|             | Connected machine capabilities. Estimated Installation Time: 0.5 hr                                                                             |                                                 |              |
| 7302928     | Rear Mirror Kit.....                                                                                                                            |                                                 | \$ _____     |
|             | Flat rear mounted mirror, used to view rear hitch for trailer hook up. Estimated Installation Time: 0.5 hr                                      |                                                 |              |
| 7450566     | Rear View Camera.....                                                                                                                           |                                                 | \$ _____     |
|             | Compatible with standard 5" display. Includes camera and harness. Estimated Installation Time: 3.0 hr                                           |                                                 |              |

## TL723 Telehandler



### Standard Equipment

100 HP Tier 4 Non DPF Turbocharged Engine  
Attachment Control Device (7 Pin)  
Auto Boom Suspension & Boom Float  
Automatic Parking Brake With Slope Assist  
Auxiliary Hydraulics W/ Coupler Release Block  
Back-Up Alarm  
Bobcat Standard 5" Display  
Bobcat Power Quick-Tach Hydraulic Coupler System  
Boom Stop  
Eco Mode  
Enclosed Cab With;  
Heat/Air Conditioning; Front, Rear, And Roof  
Washer/Wipers; Dome Light; Power Port; Air Suspension  
Seat; Retractable Seat Belt; Tilt And Telescoping Steering;  
Radio Ready; Sun Visor; Fixed Armrest; Acd Keypad  
Exhaust System: Diesel Oxidation Catalyst (DOC/SCR)  
With; Spark Arrestor  
Front/Four-Wheel/Crab/Semi-Crab Steering  
Hitch: Rear Pin Type

Hydrostatic Transmission:  
With Electronic Gearbox, 4 speeds, Advanced Attachment  
Control, & Flex Drive (Engine Speed Lever)  
Instrumentation:  
Hourmeter, RPM, System Voltage; Engine Temperature and  
Fuel Gauges; Warning Lights  
LED Work Lights  
Road Lights (Halogen):  
Headlights, Turn Signals, Flashers, Tail Lights, Reverse  
Light (RH side), Rear Fog Light (LH side)  
Mirrors: Right & Left Side  
Multi Function Joystick w/ Direction Control  
Reversible Cooling Fan With Manual And Automatic Control  
Rotating Beacon  
Smart Handling System  
Tires: 400/80 – 24  
Wheel Fenders  
Warranty: 24 Months Or Total Of 2000 Hours

- 1) Roll Over Protective Structure (ROPS) - ISO 3471 & Falling Object Protective Structure (FOPS) level II – ISO 3448

### Quick Specs

|                                       |                            |
|---------------------------------------|----------------------------|
| Max Rated Lift Capacity.....          | <b>TL723</b><br>7,718 lbs. |
| Lift Capacity to Max Height.....      | 7,718 lbs.                 |
| Engine Make.....                      | Bobcat® Engine             |
| Engine Model.....                     | D34 (Turbo)                |
| Engine Fuel/Cooling.....              | Diesel/Liquid              |
| Engine Tier (EPA).....                | Tier 4                     |
| Horsepower .....                      | 100 HP                     |
| Travel Speed I (High/Low).....        | 6.9 / 3.7 MPH              |
| Travel Speed II (High/Low).....       | 18.7 / 10.0 MPH            |
| Operating Weight.....                 | 16,471 lbs.                |
| Cab Height w/Beacon.....              | 101.9"                     |
| Width (without attachment).....       | 90.6"                      |
| Length (Fork Face to Rear Hitch)..... | 191.7"                     |
| Wheelbase.....                        | 113.0"                     |
| Lift Height.....                      | 273.9"                     |
| Auxiliary Flow/Relief Pressure.....   | 26.4 GPM/3626 PSI          |

| Part Number | Description            | Telehandler | SLP in US \$ |
|-------------|------------------------|-------------|--------------|
| M2840       | TL723 Telehandler..... |             | \$147,490    |

| Part Number | Description                                                                                                                                     | Dealer Installed Accessories - Order From Parts | SLP in US \$ |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|--------------|
| 7322390     | Beacon: LED Flashing.....                                                                                                                       |                                                 | \$ _____     |
|             | Amber, LED flashing beacon mounts to pre-wired socket on cab. Estimated Installation Time: 0.25 hr                                              |                                                 |              |
| 7168492     | Beacon: Rotating.....                                                                                                                           |                                                 | \$ _____     |
|             | Amber, rotating beacon mounts to pre-wired socket on cab. Estimated Installation Time: 0.25 hr                                                  |                                                 |              |
| 7361247     | Block Heater.....                                                                                                                               |                                                 | \$ _____     |
|             | Must order Block Heater (includes power cord) w/Ref 4 & 5, and PN 6678668 - Strap x 7. Estimated Installation Time: 1.0 -3.0 hr                 |                                                 |              |
| 7454393     | Boom Work Light Kit (LED).....                                                                                                                  |                                                 | \$ _____     |
|             | Illuminates attachment work area. Mounts on boom. Estimated Installation Time: 1.0 hr                                                           |                                                 |              |
| 46891158    | Digital Radio w/ Hands Free Calling.....                                                                                                        |                                                 | \$ _____     |
|             | DIN style radio. AM/FM. See Parts Dept for alternative radio's. Estimated Installation Time: 0.5 hr                                             |                                                 |              |
| 7453147     | Dual Direction Selector Kit.....                                                                                                                |                                                 | \$ _____     |
|             | Secondary direction control lever integrated into the steering column. Estimated Installation Time: 0.5 hr                                      |                                                 |              |
| 7310798     | Dust Protection Kit.....                                                                                                                        |                                                 | \$ _____     |
|             | Kit to help prevent dust and dirt from entering between the fixed boom and the inner boom. Estimated Installation Time: 1.0 hr                  |                                                 |              |
| 7497063     | Easy Greasing Kit.....                                                                                                                          |                                                 | \$ _____     |
|             | Zerks and tubline routings for easier greasing of axles, boom cylinders. Estimated Installation Time: 4 hr                                      |                                                 |              |
| 7450300     | Fire Extinguisher Kit.....                                                                                                                      |                                                 | \$ _____     |
|             | Estimated Installation Time: 0.25 hr                                                                                                            |                                                 |              |
| 7452653     | Front Window Guard Kit.....                                                                                                                     |                                                 | \$ _____     |
|             | Protective grill for front window. Kit increases cab height. Estimated Installation Time: 0.5 hr                                                |                                                 |              |
| 7453311     | Keyless Start Kit.....                                                                                                                          |                                                 | \$ _____     |
|             | Replaces key with non-keyed switch, security codes are accessed through standard 5" display w/ Jog shuttle. Estimated Installation Time: 0.5 hr |                                                 |              |
| 7395953     | NA Telematics-Machine IQ.....                                                                                                                   |                                                 | \$ _____     |
|             | Connected machine capabilities. Estimated Installation Time: 0.5 hr                                                                             |                                                 |              |
| 7403920     | Rear Mirror Kit.....                                                                                                                            |                                                 | \$ _____     |
|             | Flat rear mounted mirror, used to view rear hitch for trailer hook up. Estimated Installation Time: 0.5 hr                                      |                                                 |              |
| 7450569     | Rear View Camera.....                                                                                                                           |                                                 | \$ _____     |
|             | Compatible with standard 5" display. Includes camera and harness. Estimated Installation Time: 0.5 hr                                           |                                                 |              |



## TL923 V-Drive Telehandler



### Standard Equipment

135 HP Tier 4 Non DPF Turbocharged Engine  
 Attachment Control Device (7 pin)  
 Auto Boom Suspension & Boom Float  
 Automatic Parking Brake with Slope Assist  
 Auxiliary Hydraulics w/ Coupler Release Block  
 Back-up Alarm  
 Bobcat 7" Display with integrated Radio  
 Bobcat Power Quick-Tach Hydraulic Coupler System  
 Boom Stop  
 Eco Mode  
 Enclosed Cab With;  
 Heat/Air Conditioning; Front, Rear, And Roof  
 Washer/Wipers; Dome Light; Power Port; Heated Air  
 Suspension Seat; ACD Keypad; Retractable Seat Belt; Tilt  
 And Telescoping Steering; Sun Visor  
 Exhaust System: Diesel Oxidation Catalyst (DOC/SCR)  
 With; Spark Arrestor  
 High flow hydraulics with Load Sensing Hydraulic Pump  
 Hitch: Rear Pin Type

Hydrostatic V-Drive Transmission:  
 CVT Transmission with 2 speeds (High/Low), Advanced  
 Attachment Control, Flex Drive (Engine Speed Lever), Stop  
 & Start (Engine Feature), Maximum Speed Limiter and  
 Cruise Control.  
 Instrumentation:  
 Hourmeter, RPM, System Voltage; Engine Temperature and  
 Fuel Gauges; Warning Lights  
 LED Work Lights  
 Road Lights (Halogen):  
 Headlights, Turn Signals, Flashers, Tail Lights, Reverse  
 Light (RH side), Rear Fog Light (LH side)  
 Mirrors: Right & Left Side  
 Reversible Cooling Fan With Manual And Automatic Control  
 Rotating Beacon  
 Seat Mounted Multi Function Joystick w/ Direction Control  
 Smart Handling System  
 Tires: 400/80 – 24  
 Wheel Fenders  
 Warranty: 24 Months Or Total Of 2000 Hours

1) Roll Over Protective Structure (ROPS) - ISO 3471 & Falling Object Protective Structure (FOPS) level II – ISO 3450

### Quick Specs

|                                       | <b>TL923 V-Drive</b> |
|---------------------------------------|----------------------|
| Max Rated Lift Capacity.....          | 9,039 lbs.           |
| Lift Capacity to Max Height.....      | 7,055 lbs.           |
| Engine Make.....                      | Bobcat® Engine       |
| Engine Model.....                     | D34 (Turbo)          |
| Engine Fuel/Cooling.....              | Diesel/Liquid        |
| Engine Tier (EPA).....                | Tier 4               |
| Horsepower .....                      | 135 HP               |
| Travel Speed I (High/Low).....        | 24.9 / 12.4 MPH      |
| Operating Weight.....                 | 18,375 lbs.          |
| Cab Height w/Beacon.....              | 101.9"               |
| Width (without attachment).....       | 90.6"                |
| Length (Fork Face to Rear Hitch)..... | 195.9"               |
| Wheelbase.....                        | 113.0"               |
| Lift Height.....                      | 277.2"               |
| Auxiliary Flow/Relief Pressure.....   | 39.6 GPM/3699 PSI    |



| Part Number | Description                    | Telehandler | SLP in US \$ |
|-------------|--------------------------------|-------------|--------------|
| M2843       | TL923 V-Drive Telehandler..... |             | \$178,890    |

| Part Number | Description                                                                                                                        | Dealer Installed Accessories - Order From Parts | SLP in US \$ |
|-------------|------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|--------------|
| 7168492     | Beacon: Rotating.....                                                                                                              |                                                 | \$ _____     |
|             | Amber, rotating beacon mounts to pre-wired socket on cab. Estimated Installation Time: 0.25 hr                                     |                                                 |              |
| 7361247     | Block Heater.....                                                                                                                  |                                                 | \$ _____     |
|             | Must order Block Heater (includes power cord) w/Ref 4 & 5, and PN 6678668 - Strap x 7.<br>Estimated Installation Time: 1.0 -3.0 hr |                                                 |              |
| 7454393     | Boom Work Light Kit (LED).....                                                                                                     |                                                 | \$ _____     |
|             | Illuminates attachment work area. Mounts on boom. Estimated Installation Time: 1.0 hr                                              |                                                 |              |
| 7453147     | Dual Direction Selector Kit.....                                                                                                   |                                                 | \$ _____     |
|             | Secondary direction control lever integrated into the steering column. Estimated Installation Time: 0.5 hr                         |                                                 |              |
| 7310798     | Dust Protection Kit.....                                                                                                           |                                                 | \$ _____     |
|             | Kit to help prevent dust and dirt from entering between the fixed boom and the inner boom.<br>Estimated Installation Time: 1.0 hr  |                                                 |              |
| 7497063     | Easy Greasing Kit.....                                                                                                             |                                                 | \$ _____     |
|             | Zerks and tubline routings for easier greasing of axles, boom cylinders. Estimated Installation Time: 4 hr                         |                                                 |              |
| 7450300     | Fire Extinguisher Kit.....                                                                                                         |                                                 | \$ _____     |
|             | Estimated Installation Time: 0.25 hr                                                                                               |                                                 |              |
| 7452653     | Front Window Guard Kit.....                                                                                                        |                                                 | \$ _____     |
|             | Protective grill for front window. Kit increases cab height. Estimated Installation Time: 0.5 hr                                   |                                                 |              |
| 7453311     | Keyless Start Kit.....                                                                                                             |                                                 | \$ _____     |
|             | Replaces key with non-keyed switch, security codes are accessed through standard 5" display w/                                     |                                                 |              |
| 7395953     | NA Telematics-Machine IQ.....                                                                                                      |                                                 | \$ _____     |
|             | Connected machine capabilities. Estimated Installation Time: 0.5 hr                                                                |                                                 |              |
| 7450173     | Rear LED Light.....                                                                                                                |                                                 | \$ _____     |
|             | Rear light that attaches to the binker bracket. Estimated Installation Time: 1.0 hr                                                |                                                 |              |
| 7403920     | Rear Mirror Kit.....                                                                                                               |                                                 | \$ _____     |
|             | Flat rear mounted mirror, used to view rear hitch for trailer hook up. Estimated Installation Time:                                |                                                 |              |
| 7450569     | Rear View Camera.....                                                                                                              |                                                 | \$ _____     |
|             | Compatible with standard 5" display. Includes camera and harness. Estimated Installation Time: 0.5 hr                              |                                                 |              |