

Bobcat®

- All prices are shown in U.S. dollars.
- Check BobcatNET Pricing Homepage for current Canadian exchange rate.
- All Parts Pricing valid only for North America.
- Prices and specifications are subject to change without notice.

[illegible]

North American Suggested List Prices
2025 Price Book
Page 1 of 65

Attachment Control Kit Bobcat Work Machine Attachment

Attachment Control Kits need to be installed on Bobcat loaders to operate the following attachments:

Angle Broom
Chipper
Dozer Blade


Grader
Snow V-Blade
Snowblower

Soil Conditioner, Hydraulic
Stump Grinder

Part Number		Description	Dealer Installed Accessories - Order From Parts	
<u>For current Attachment pricing, reference BobQuote or Dealer Parts Department.</u>				
7133350		Attachment Control Kit, 7-Pin..... (For 5600 G-Series, 5600 F-Series, 5600 D-Series, 5610) (Controls 7-Pin Attachments only) (Includes 3 switches mounted in center console) (Estimated Install Time 1 hour)	Parts	\$_____
7114292		Attachment Control Kit, 7-Pin..... (For 5600 C-Series) (Controls 7-Pin Attachments only) (Includes 3 switches mounted in center console) (Estimated Install Time 1 hour)	Parts	\$_____
6815260		Attachment Control Kit, 7-Pin..... (For 5600 A-Series and B-Series) (Controls 7-Pin Attachments only) (Includes 3 switches mounted in center console) (Estimated Install Time 1 hour)	Parts	\$_____
7120242		Attachment Control Kit, 14-Pin..... (Control box is similar to Attachments Plus Control Kit (p/n 6815254)) (Required for 14-Pin Attachments) (Estimated install time 1.5 hours)	Parts	\$_____
6725381		14-Pin Attachment T-Harness Kit..... (Used with 68" & 84" Angle Brooms and 72" and 84" Hydraulic Soil Conditioners) (A 14-Pin T-Harness Kit is required when used on work machine equipped with a 14-Pin Attachment Control Kit – See Page 1) (Estimated install time .5 hours)	Parts	\$_____
6725384		14-Pin Attachment T-Harness Kit..... (Use with 7-pin attachment installed on loader with 14-pin control) (Used with Dozer Blade) (Estimated install time .5 hours)	Parts	\$_____

Angle Broom

Bobcat Work Machine Attachment

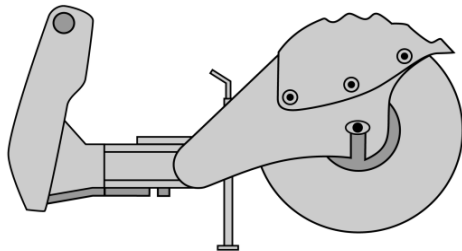

Quick Specs

	<u>68"</u>	<u>84"</u>
Operating Weight.....	860 lbs.	944 lbs.
Sweep Width Straight.....	68"	84"
Sweep Width Fully Angled.....	63" @ 25°	77" @ 25°
Broom Angling.....	Hydraulic Cylinder	Hydraulic Cylinder
Oscillation.....	Fixed	Fixed
Drive System.....	Hyd. Direct Drive	Hyd. Direct Drive
Flow Range.....	15-28 GPM	15-28 GPM
Broom Bristle Diameter.....	32"	32"
Bristle Material.....	Poly Orange HD	Poly Orange HD
Number of Bristle Sections.....	36 Zig-Zag 2 Straight	44 Zig-Zag 2 Straight
Electrical.....	7 Pin Standard	7 Pin Standard


Part Number	Description	Attachment	SLP in US \$
(5600, 5610) (UW56, UW53)			
7337703	68" Angle Broom.....		\$8,169.00
	(Work Machine must be equipped with a 7-Pin Attachment Control Kit) (A 14-Pin T-Harness Kit is required when used on work machine equipped with a 14-Pin Attachment Control Kit – See Page 1)		
(5600, 5600H, 5610) (UW56, UW56H, UW53)			
7337715	84" Angle Broom.....		\$9,332.00
	(Work Machine must be equipped with a 7-Pin Attachment Control Kit) (A 14-Pin T-Harness Kit is required when used on work machine equipped with a 14-Pin Attachment Control Kit – See Page 1)		

Destination Charge/Fuel Surcharge

Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
Angle Broom.....	None.....	-
Attachment Control Kit.....		See Page 1

Auger- Planetary Drive Bobcat Work Machine Attachment

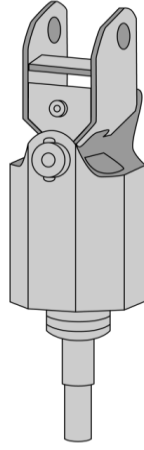

Auger Drive Unit

Planetary Drive Auger Quick Specs

	<u>Model 14PH/PC</u>	<u>Model 20PH/PC</u>	<u>Model 25PH/PC</u>	<u>Model 30PH</u>
Ship Weight (Auger Drive).....	140 lbs.	140 lbs.	141 lbs.	216 lbs.
Ship Weight (Mtg. Frame).....	118 lbs	118 lbs	118 lbs	118 lbs
Operating Weight (less bit).....	258 lbs	258 lbs	259 lbs	334 lbs
Digging Depth (without extensions).....	56"	56"	56"	56"
Torque.....	Low	Medium	Medium	High
Speed.....	Medium	Medium	Low	Low
Shaft Diameter - Round.....	2.5 (PC ONLY)	2.5 (PC ONLY)	2.5 (PC ONLY)	2.5
Shaft Diameter - Hex.....	2.0"	2.0"	2.0"	

Part Number	Description	Attachment	SLP in US \$
(5600, 5610) (UW56, UW53)			
7501034	Model 14PH Auger Drive Unit.....		\$2,327.00
	(Must also order Mounting Frame for Machine and Bit)(2" Hex shaft to connect to bit) (Auger Bit is shipped with bit retention pin)		
46948006	Model 14PC Auger Drive Unit.....		\$2,380.00
	(Combination 2" hex / 2.5" round output shaft) (Must also order Mounting Frame for Machine and Bit)(Auger Bit is shipped with bit retention pin)		
7501035	Model 20PH Auger Drive Unit.....		\$2,417.00
	(Must also order Mounting Frame for Machine and Bit)(2" Hex shaft to connect to bit) (Auger Bit is shipped with bit retention pin)		
46948007	Model 20PC Auger Drive Unit.....		\$2,470.00
	(Combination 2" hex / 2.5" round output shaft) (Must also order Mounting Frame for Machine and Bit)(Auger Bit is shipped with bit retention pin)		
7501036	Model 25PH Auger Drive Unit.....		\$2,554.00
	(Must also order Mounting Frame for Machine and Bit)(2" Hex shaft to connect to bit) (Auger Bit is shipped with bit retention pin)		
46948008	Model 25PC Auger Drive Unit.....		\$2,607.00
	(Combination 2" hex / 2.5" round output shaft) (Must also order Mounting Frame for Machine and Bit)(Auger Bit is shipped with bit retention pin)		
46890491	Model 30PH Auger Drive Unit.....		\$3,928.00
	(Must also order Mounting Frame for Machine and Bit)(Auger ships with both 2" Hex and 2.5" Round output adapters)(Auger Bit is shipped with bit retention pin)		

Dealer Installed Auger Frames - Order From Sales		
Part Number	Description	SLP in US \$
7508119	12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH Mounting Frame..... (Includes Mounting Hardware to attach auger drive)	\$755.00

Dealer Installed Auger Bits - Order From Parts		
Part Number	Description	SLP in US \$

14PH/PC Augers—Recommended bit size 6" – 18"
20PH/PC, 25PH/PC —Recommended bit size 6" – 30"
30PH - Recommended bit size 6"-36"
Auger bit combinations should be used as a guideline. Recommendations are based upon average digging conditions. Some combinations may contact machine frame.

Light Duty Auger Bits

*Approved for 14PH/PC, 20PH/PC, 25PH/PC, and 30PH augers
Black color, Semi-Flight unless noted.
48" Length. Shaft Diameter- 2" Hex
Retaining Pin ships with auger*

		<u>Parts</u>
7500735	6" Semi-Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$_____
7500736	9" Semi-Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$_____
7500737	12" Semi-Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$_____
7500738	15" Semi-Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$_____
7500739	18" Semi-Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$_____
7500740	24" Semi-Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$_____
7500746	30" Double Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$_____
7500747	36" Double Flight (2" Hex).....	\$_____

Standard Duty Auger Bits

*Approved for 14PH/PC, 20PH/PC, 25PH/PC, and 30PH augers
Black color, Single Flight unless noted.
48" Length. Shaft Diameter- 2" Hex
Not compatible with Model 10, 35PH or 50PH augers
Retaining Pin ships with auger*

		<u>Parts</u>
7500763	6" Single Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$_____
7500765	9" Single Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$_____
7500767	12" Single Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$_____
7500768	15" Single Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$_____
7500769	18" Single Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$_____
7500771	24" Single Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$_____

Part Number	Description	Dealer Installed Auger Bits - Order From Parts
-------------	-------------	--

Heavy Duty Auger Bits

Approved for 14PH/PC, 20PH/PC, 25PH/PC, and 30PH augers

Black color, Single Flight unless noted.

48" Length. Shaft Diameter- 2" Hex

Not compatible with 35PH or 50PH augers

Retaining Pin ships with auger

		<u>Parts</u>
7500798	6" Single Flight (2" Hex) (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$ ____
7500800	9" Single Flight (2" Hex) (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$ ____
7500802	12" Single Flight (2" Hex) (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$ ____
7500803	15" Single Flight (2" Hex) (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$ ____
7500805	20" Single Flight (2" Hex) (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$ ____
7500806	24" Single Flight (2" Hex) (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$ ____
7500807	30" Single Flight (2" Hex) (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$ ____
7500808	36" Single Flight (2" Hex) (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$ ____
7500812	9" Double Flight (2" Hex) (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$ ____
7500814	12" Double Flight (2" Hex) (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$ ____
7500816	18" Double Flight (2" Hex) (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$ ____
7500818	24" Double Flight (2" Hex) (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$ ____

Tree Auger Bits

Approved for 14PH/PC, 20PH/PC, 25PH/PC, and 30PH augers

Black color, Double Flight

48" Length. Shaft Diameter- 2" Hex

Not compatible with 35PH or 50PH augers

Retaining Pin ships with auger

		<u>Parts</u>
7500822	18" Tree Auger Bit (2" Hex) (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$ ____
7500823	24" Tree Auger Bit (2" Hex) (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$ ____
7500841	30" Tree Auger Bit (2" Hex) (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$ ____
7500842	36" Tree Auger Bit (2" Hex) (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$ ____

Rock Auger Bits

Approved for 14PH/PC, 20PH/PC, 25PH/PC, and 30PH augers

Black color, Double Flight, Carbide tips

48" Length. Shaft Diameter- 2" Hex


Not compatible with 35PH or 50PH augers

Retaining Pin ships with auger

		<u>Parts</u>
7500916	6" Carbide Rock Auger Bit (2" Hex) (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$ ____
7500918	9" Carbide Rock Auger Bit (2" Hex) (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$ ____
7500922	18" Carbide Rock Auger Bit (2" Hex) (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$ ____
7500923	24" Carbide Rock Auger Bit (2" Hex) (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$ ____

Dealer Installed Accessories - Order From Parts			
Part Number	Description		
6679807	48" Adjustable Hex Extension..... (For Model 15H, 15C, 30H and 30C &PC Augers) (Ship Weight 48 lbs.)	Parts	\$_____
7515529	2" HEX SHAFT TO 2 1/2" ROUND BIT ADAPTER..... (For Model 12PH, 14PH, 20PH, 25PH, & 30PH Augers with Hex Output Shaft to use with round shaft bits)	Parts	\$_____
6662875	Hex Shaft to Round Bit Adapter, Cast..... (For Model 15H & 30H Augers with Hex Output Shaft) (Ship Weight 20 lbs.)	Parts	\$_____
7137091	Hex Shaft to Round Bit Adapter, Sleeve..... (For Model 15H & 30H Augers with Hex Output Shaft) (5/8" Pin Kit P/N 6809733 is required.) (Sleeve slides over hex shaft, converting it to round) (Ship Weight 3 lbs.)	Parts	\$_____

Auger- Direct Drive Bobcat Work Machine Attachment

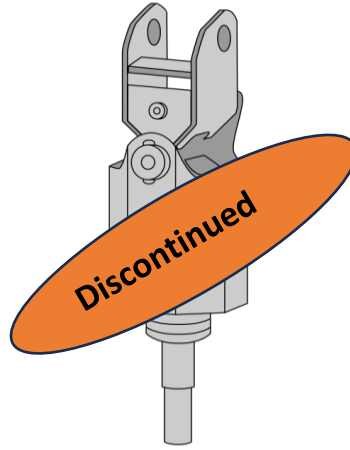

Auger Drive Unit

Direct Drive Auger Quick Specs

	<u>Model 15C</u>	<u>Model 15H</u>	<u>Model 30C</u>	<u>Model 30H</u>
Ship Weight (Auger Drive).....	245 lbs.	246 lbs.	263 lbs.	257 lbs.
Ship Weight (Mtg. Frame).....	193lbs	193 lbs	193 lbs	193 lbs
Operating Weight (less bit).....	345 lbs.	358 lbs.	376 lbs.	370 lbs.
Digging Depth (without extensions).....	62"	62"	62"	62"
Torque.....	Medium	Medium	High	High
Speed.....	Medium	Medium	Low	Low
Shaft Diameter - Round.....	2.5"	-	2.5"	-
Shaft Diameter - Hex.....	2.0"	2.0"	2.0"	2.0"

Part Number	Description	Attachment	SLP in US \$
(5600, 5610) (UW56, UW53)			
6809442	Model 15C Auger Drive Unit (Must also order Mounting Frame and Bit) (Auger drive unit is shipped with a 7/8" round bit retention pin, if used in conjunction with a hex bit a 5/8" Pin Kit P/N 6809733 is required.)		Discontinued
7145345	Model 15H Auger Drive Unit (Must also order Mounting Frame and Bit)		Discontinued
(5600H, 5610) (UW56H, UW53)			
6809445	Model 30C Auger Drive Unit (Must also order Mounting Frame and Bit) (Auger drive unit is shipped with a 7/8" round bit retention pin, if used in conjunction with a hex bit a 5/8" Pin Kit P/N 6809733 is required.)		Discontinued
7138264	Model 30H Hex Shaft Auger Drive Unit (Must also order Mounting Frame and Bit)		Discontinued

Dealer Installed Auger Frames - Order From Sales		
Part Number	Description	SLP in US \$
6812980	Mounting Frame..... (Includes Mounting Hardware)	Discontinued

Dealer Installed Accessories - Order From Parts		
Part Number	Description	

For current Dealer Installed Accessories pricing, reference BobQuote or Dealer Parts Department.

Light Duty Auger Bits

White, round Drive, 45" Length, Single Flight.

(5600, 5610) (UW56, UW53)			
6679574	6" Bit..... (Ship Weight 45 lbs.)	Parts	\$____
6679575	9" Bit..... (Ship Weight 53 lbs.)	Parts	\$____
6679576	12" Bit..... (Ship Weight 100 lbs.)	Parts	\$____
6679577	15" Bit..... (Ship Weight 120 lbs.)	Parts	\$____
6679578	18" Bit..... (Ship Weight 79 lbs.)	Parts	\$____
6679579	24" Bit..... (Ship Weight 144 lbs.)	Parts	\$____
6679580	30" Bit..... (Ship Weight 124 lbs.)	Parts	\$____
6679581	36" Bit..... (Ship Weight 165 lbs.)	Parts	\$____

Standard Auger Bits & Accessories

Charcoal Color, Round Drive, 49" Length, Double Flight, Variable Tooth Angle: 40 ° or 50 °

(5600, 5610) (UW56, UW53)			
6666891	6" Bit..... (Ship Weight 60 lbs.)	Parts	\$____
6666892	9" Bit..... (Ship Weight 91 lbs.)	Parts	\$____
6666893	12" Bit..... (Ship Weight 128 lbs.)	Parts	\$____
6666894	15" Bit..... (Ship Weight 119 lbs.)	Parts	\$____
6666895	18" Bit..... (Ship Weight 160 lbs.)	Parts	\$____
6666896	24" Bit..... (Ship Weight 203 lbs.)	Parts	\$____
6666900	24" Tree Planting Bit..... (Ship Weight 162 lbs.)	Parts	\$____
6666901	30" Tree Planting Bit..... (Ship Weight 162 lbs.)	Parts	\$____

Part Number	Description	Dealer Installed Accessories - Order From Parts	
-------------	-------------	---	--

For current Dealer Installed Accessories pricing, reference BobQuote or Dealer Parts Department.

Standard Auger Bits & Accessories

Charcoal Color, Round Drive, 49" Length, Double Flight, Variable Tooth Angle: 40 ° or 50 °

(5600 C-Series)

6666897	30" Bit..... (Use with 5600 s/n A00211001 & above and 5600T s/n A00311001 and above) (Ship Weight 275 lbs.)	Parts	\$_____
6666898	36" Bit (Model 15 & 30)..... (Use with 5600 s/n A00211001 & above and 5600T s/n A00311001 and above) (Ship Weight 380 lbs.)	Parts	\$_____
6666901	30" Tree Planting Bit..... (Use with 5600 s/n A00211001 & above and 5600T s/n A00311001 and above) (Ship Weight 236 lbs.)	Parts	\$_____
6666902	36" Tree Planting Bit..... (Use with 5600 s/n A00211001 & above and 5600T s/n A00311001 and above) (Ship Weight 305 lbs.)	Parts	\$_____

Heavy Duty Auger Bits & Accessories

Orange Color, Hex Drive, 42" Length, Single Flight

(5600, 5610) (UW56, UW53)

6674957	6" Bit..... (If installed on a 15C or 30C Auger drive unit, a 5/8" Pin Kit P/N 6809733 is required) (Ship Weight 46 lbs.)	Parts	\$_____
6674958	9" Bit..... (If installed on a 15C or 30C Auger drive unit, a 5/8" Pin Kit P/N 6809733 is required) (Ship Weight 59 lbs.)	Parts	\$_____
6674959	12" Bit..... (If installed on a 15C or 30C Auger drive unit, a 5/8" Pin Kit P/N 6809733 is required) (Ship Weight 76 lbs.)	Parts	\$_____
6674960	16" Bit..... (If installed on a 15C or 30C Auger drive unit, a 5/8" Pin Kit P/N 6809733 is required) (Ship Weight 97 lbs.)	Parts	\$_____
6675034	18" Bit..... (If installed on a 15C or 30C Auger drive unit, a 5/8" Pin Kit P/N 6809733 is required) (Ship Weight 112 lbs.)	Parts	\$_____
6674961	20" Bit..... (If installed on a 15C or 30C Auger drive unit, a 5/8" Pin Kit P/N 6809733 is required) (Ship Weight 117 lbs.)	Parts	\$_____
6674962	24" Bit..... (If installed on a 15C or 30C Auger drive unit, a 5/8" Pin Kit P/N 6809733 is required) (Ship Weight 151 lbs.)	Parts	\$_____
6674963	30" Bit..... (If installed on a 15C or 30C Auger drive unit, a 5/8" Pin Kit P/N 6809733 is required) (Ship Weight 193 lbs.)	Parts	\$_____

(5600 C-Series)

6674964	36" Bit..... (If installed on a 15C or 30C Auger drive unit, a 5/8" Pin Kit P/N 6809733 is required) (Ship Weight 270 lbs.)	Parts	\$_____
6674965	42" Bit..... (Use with 5600 s/n A00211001 & above and 5600T s/n A00311001 and above) (Ship Weight 302 lbs.)	Parts	\$_____

Part Number	Description	Dealer Installed Accessories - Order From Parts	
-------------	-------------	---	--

For current Dealer Installed Accessories pricing, reference BobQuote or Dealer Parts Department.

Rock Auger Bits

White Color, Hex Shaft, 42" Length, Single Flight

(5600, 5610) (UW56, UW53)			
7169665	6" Bit..... (Ship Weight 64 lbs.)	Parts	\$_____
7169666	9" Bit..... (Ship Weight 78 lbs.)	Parts	\$_____
7169667	12" Bit..... (Ship Weight 102 lbs.)	Parts	\$_____
7169668	16" Bit..... (Ship Weight 123 lbs.)	Parts	\$_____
7169669	18" Bit..... (Ship Weight 149 lbs.)	Parts	\$_____
7169670	20" Bit..... (Ship Weight 152 lbs.)	Parts	\$_____
7169671	24" Bit..... (Ship Weight 195 lbs.)	Parts	\$_____

(5600 C-Series)			
7169672	30" Bit..... (Use with 5600 s/n A00211001 & above and 5600T s/n A00311001 and above) (Ship Weight 225 lbs.)	Parts	\$_____

Standard Auger Bits Accessories

6679806	48" Adjustable Round Extension..... (For Model 10, 15, 15C, 30 and 30C & PC Augers) (6" and 9" bits will not allow the extension to telescope, only works in the top position) (Ship Weight 82 lbs.)	Parts	\$_____
6679826	24" Adjustable Round Extension..... (For Model 10, 15, 15C, 30 and 30C U& PC Augers) (6" and 9" bits will not allow the extension to telescope, only works in the top position) (Ship Weight 44 lbs.)	Parts	\$_____
6679825	14" Round Extension..... (For Model 10, 15, 15C, 30 and 30C & PC Augers) (Ship Weight 24 lbs.)	Parts	\$_____

Heavy Duty Auger Bits Accessories/Rock Auger Bits Accessories

6809733	5/8" (.625) Pin Kit..... (Used for retention of hex bits on 15C and 30C Auger drive units) (Ship Weight 11 lbs.)	Parts	\$_____
6679807	48" Adjustable Hex Extension..... (For Model 15H, 15C, 30H and 30C &PC Augers) (Ship Weight 48 lbs.)	Parts	\$_____
6662876	24" Adjustable Hex Extension..... For Model 15H, 15C, 30H and 30C & PC Augers) (Ship Weight 33 lbs.)	Parts	\$_____
6662874	Round Shaft to Hex Bit Adapter, Cast..... (For Model 15 & 30 Augers with Round Output Shaft) (Ship Weight 19 lbs.)	Parts	\$_____
6662875	Hex Shaft to Round Bit Adapter, Cast..... (For Model 15H & 30H Augers with Hex Output Shaft) (Ship Weight 20 lbs.)	Parts	\$_____
7137091	Hex Shaft to Round Bit Adapter, Sleeve..... (For Model 15H & 30H Augers with Hex Output Shaft) (5/8" Pin Kit P/N 6809733 is required.) (Sleeve slides over hex shaft, converting it to round) (Ship Weight 3 lbs.)	Parts	\$_____

Destination Charge/Fuel Surcharge


Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
------------	-------------------	---------------------------

Auger.....	Assemble drive unit to mounting frame and install bit.....	0.50
------------	--	------

Bale Forks

Bobcat Work Machine Attachment

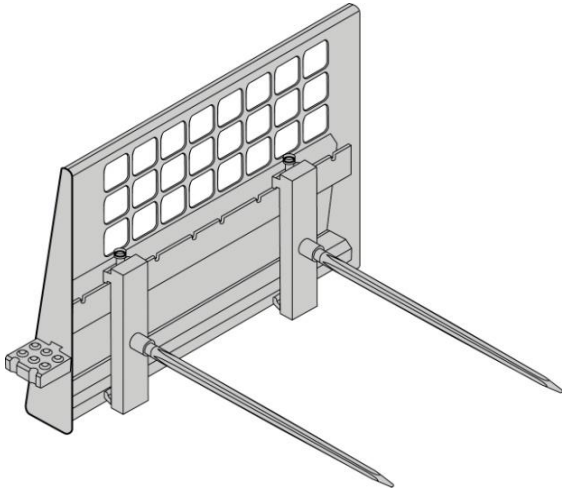

Bale Forks with Pallet Fork Frame

Quick Specs

Operating Weight.....

100 lbs

Operating Capacity.....

1,500 lbs.

Length of Fork.....

40.8"


Part Number	Description	Attachment	SLP in US \$
(5600, 5610) (UW56, UW53) 6815781	Bale Forks, Set of 2..... (Must also order pallet fork frame p/n 6712927, 7297499, 7294305, or 7294332)		\$1,039.00

Destination Charge/Fuel Surcharge

Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
Bale Forks.....	None.....	-

Box Blade Bobcat Work Machine Attachment
--



Quick Specs


Operating Weight..... 980 lbs. (445 kg)
 Height..... 32.0" (813 mm)
 Width..... 85.5" (2173 mm)
 Moldboard Width..... 84.0" (2134 mm)
 Moldboard Cutting Edge (Reversible)..... ½" x 6"

Part Number	Description	Attachment	SLP in US \$
(5600, 5610) (UW56, UW53) 6906574	84" Box Blade..... (Used for rough grading and landscaping)		\$6,232.00

Destination Charge/Fuel Surcharge Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
Box Blade.....	Install cylinder pin.....	0.25

Brushcat™ Rotary Cutter Bobcat Work Machine Attachment

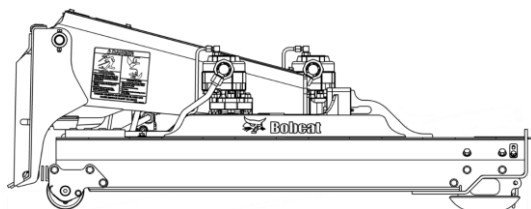

Quick Specs

	<u>RC66</u>	<u>RC66HF</u>	<u>RC72</u>	<u>RC72HF</u>
Operating Weight.....	1437 lbs	1437 lbs	1500 lbs	1500 lbs
Hydraulic Flow Range.....	15-24 gpm	24-36 gpm	15-26 gpm	24-40 gpm
Blade Tip Speed (Minimum Flow / ft./min).....	11,399	11,394	9,922	9,922
Blade Tip Speed (Maximum Flow / ft./min).....	18,238	17,064	17,197	16,536
Cutting Width.....	66"	66"	72"	72"
Cutting Height.....	3"	3"	3"	3"
Deck Length.....	61.1"	61.1"	64.3"	64.3"
Vertical Travel.....	8"	8"	8"	8"
Overall Width.....	70.3"	70.3"	76.3"	76.3"
Overall Height.....	26.5"	26.5"	26.5"	26.5"
Overall Length.....	67.2"	67.2"	70.4"	70.4"
Cutting Capacity.....	Brush material up to 3 in. in diameter for all models			

Part Number	Description	Attachment	SLP in US \$
(5600, 5610) (UW56, UW53)			
7234049	RC66 Brushcat Rotary Cutter..... (Not approved for A-Series or B-Series) (Approved for use with 5600 s/n A00211001 & above, 5600 s/n A00311001 & above, 5600 s/n A0W111001 & above, 5600 s/n A94Y11001 & above, 5610 A7Y711001 & above and 5610 APFB11001 & above, 5610 B2LH11001 & above) (Comes with 3" Offset Blades and Front Discs) (Cutting height of 3")		\$9,470.00
7218087	RC72 Brushcat Rotary Cutter..... (Not approved for A-Series or B-Series) (Approved for use with 5600 s/n A00211001 & above, 5600 s/n A00311001 & above, 5600 s/n A0W111001 & above, 5600 s/n A94Y11001 & above, 5610 A7Y711001 & above and 5610 APFB11001 & above, 5610 B2LH11001 & above) (Comes with 3" Offset Blades and Front Discs Assembled) (Cutting height of 3")		\$9,947.00
(5600H, 5610) (UW56H, UW53)			
7233014	RC66HF Brushcat Rotary Cutter..... (Not approved for A-Series or B-Series) (Approved for use with 5600 s/n A00311001 & above, 5600 s/n A0W111001, & above, 5600 s/n A94Y11001 & above, 5610 A7Y711001 & above and 5610 APFB11001 & above, 5610 B2LH11001 & above) (Comes with 3" Offset Blades and Front Discs) (Cutting height of 3")		\$11,092.00
7233002	RC72HF Brushcat Rotary Cutter..... (Not approved for A-Series or B-Series) (Approved for use with 5600 s/n A00311001 & above, 5600 s/n A0W111001, & above, 5600 s/n A94Y11001 & above, 5610 A7Y711001 & above and 5610 APFB11001 & above, 5610 B2LH11001 & above) (Comes with 3" Offset Blades and Front Discs) (Cutting height of 3")		\$11,376.00

Part Number		Dealer Installed Accessories - Order From Parts	
Description			


For current Dealer Installed Accessories pricing, reference BobQuote or Dealer Parts Department.

7242262	4" Cutting Height Blades Kit..... (For 66" Rotary Cutter) (Includes (4) Blades and Mounting Hardware)	Parts	\$ ____
7242261	Front Roller Kit.....	Parts	\$ ____
7244897	Motor Cover Kit.....	Parts	\$ ____

Destination Charge/Fuel Surcharge	
Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.	

Attachment	Assembly Required	Installation Time (Hours)
Brushcat Rotary Cutter.....	None.....	-
Blade Kits.....	Install blades.....	1.50
Front Roller Kit.....	Install rollers.....	1.00
Motor Cover Kit.....	Install covers.....	0.50

Bucket **Bobcat Work Machine Attachment**

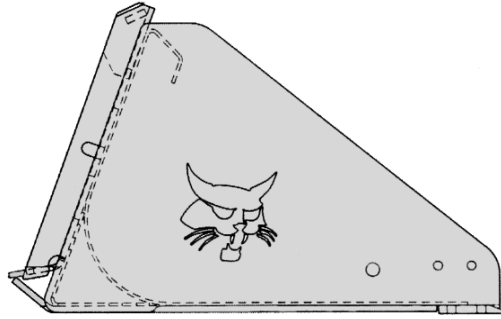

Backhoe Buckets - Order From Sales

Part Number	Description	SAE Capacity (FT³)		Ship WGT.	
		Struck	Heaped	(lbs.)	SLP in US \$

(5600, 5610) (UW56, UW53)

Standard Duty

7272771	68" Standard Duty Bucket.....	9.8	13.3	354	\$1,275.00
7272768	74" Standard Duty Bucket.....	10.7	14.5	373	\$1,357.00

Heavy Duty

7272678	62" Heavy Duty Bucket	11.3	15.3	476	\$1,627.00
	(62" HD Bucket will not cover width of ToolCat equipped with Wide Tires (64"))				
7272679	68" Heavy Duty Bucket	12.4	16.9	508	\$1,795.00

Light Material

7279100	68" Light Material Bucket.....	19.1	24.9	589	\$2,017.00
7279101	74" Light Material Bucket.....	20.8	27.3	632	\$2,134.00
7279102	80" Light Material Bucket.....	22.5	29.7	669	\$2,339.00

Dealer Installed Accessories - Order From Parts

Part Number	Description		
-------------	-------------	--	--

For current Dealer Installed Accessories pricing, reference BobQuote or Dealer Parts Department.

6729084	Bolt-On Corner Cutting Edge	Parts	\$_____
	(3/4" thick single bevel, threaded cutting edge. Does not require nut)		
7104508	Bolt-On Cutting Edge, 68"	Parts	\$_____
	(For 68" Standard Duty Buckets) (Hardware not included) (Estimated Install Time 1.5 hours)		
7104510	Bolt-On Cutting Edge, 74"	Parts	\$_____
	(For 74" Standard Duty Buckets) (Hardware not included) (Estimated Install Time 1.5 hours)		
6905314	Bucket Bite Tooth Bar, 62"	Parts	\$_____
6905315	Bucket Bite Tooth Bar, 68"	Parts	\$_____
6905316	Bucket Bite Tooth Bar, 74"	Parts	\$_____

Destination Charge/Fuel Surcharge


Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
------------	-------------------	---------------------------


Bucket.....	None.....	-
-------------	-----------	---

Chipper

Bobcat Work Machine Attachment



5A Chipper



8B Chipper

Quick Specs

	<u>5A</u>	<u>8B</u>
Operating Weight.....	1145 lbs	1660 lbs
Feeder Opening.....	5"	9.2"
Continuous Chipping Size.....	Up to 3" diameter material	Up to 5" diameter material
Feed Table Height.....	23.5"	25.4"
Discharge Chute Height.....	92"	93.3"
Blades.....	4 reversible tool steel blades	4 reversible tool steel blades
Dual Mounting Locations.....	Front or right side of loader	Front or right side of loader
Discharge Chute (Incl. End Deflector).....	Rotates 360°	Rotates 360°
Both chippers have automatic hydraulic feed, which includes speed control and load sensing system.		


Part Number	Description	Attachment	SLP in US \$
(5600, 5610) (UW56, UW53)			
6719129	5A Chipper.....		\$15,553.00
	(Work Machine must be equipped with a 7-Pin Attachment Control Kit) (Work Machines serial number 520512159 and below require version 27 or newer software to be installed on machine.)		
(5600H, 5610) (UW56H, UW53)			
7117662	8B Chipper.....		\$18,923.00
	(Work machine must be equipped with an 7-Pin Attachment Control Kit – See Page 1) (Approved for use with 5600 s/n 424711001 & above, 5600 s/n A0W111001 & above, 5600 s/n A94Y11001 & above, 5610 A7Y711001 & above and 5610 APFB11001 & above)		

Destination Charge/Fuel Surcharge

Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
Chipper.....	Install discharge chute.....	0.25
Attachment Control Kit.....		See page 1

Combination Bucket Bobcat Work Machine Attachment



Quick Specs

	<u>62" Combo Bucket</u>
Operating Weight.....	807 lbs
Overall Width.....	62.5"
SAE Capacity Heaped.....	10.7 ft ³
Number of Teeth.....	7 bolt-on
Max Clamping Force.....	8590 lbs

Part Number	Description	Attachment	SLP in US \$
(5600, 5610) (UW56, UW53)			
7167310	62" Combination Bucket.....		\$4,516.00
	(Approved for use with 5600 s/n A00211001 & above, 5600 s/n A00311001 & above, 5600 s/n A0W111001 & above, 5600 s/n A94Y11001 & above, 5610 A7Y711001 & above and 5610 APFB11001 & above) (Bolt-on Teeth are available from Bobcat Parts)		

Note: Combination Buckets are not approved for use with the Tilt-Tatch.

Part Number	Description	Dealer Installed Accessories - Order From Parts	
<i><u>For current Dealer Installed Accessories pricing, reference BobQuote or Dealer Parts Department.</u></i>			
6737322	8 Bolt-On Teeth Kit..... (Must purchase multiple of 8: 8x\$27.85=\$222.80) (Tooth Assembly includes Bolt-on Shank with Pin-on Tooth) (Hardware included)	Parts	\$____
7107317	Hensley Forged Tooth Point..... (Qty. 1)	Parts	\$____
7107320	Hensley Tiger Tooth Point..... (Qty. 1)	Parts	\$____
7107321	Hensley Twin Tiger Tooth Point..... (Replacement Pin-on Tooth Point) (Qty. 1)	Parts	\$____
6718005	Bolt-On Cutting Edge, 62" (Estimated install time 0.5 hours)	Parts	\$____


Destination Charge/Fuel Surcharge

Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
Combination Bucket.....	None.....	-

Dozer Blade

Bobcat Work Machine Attachment



Quick Specs

	<i>80" Dozer</i>
Operating Weight.....	950 lbs
Width.....	80"
Width (Fully Angled).....	69.3"
Blade Height.....	24.1"
Overall Height.....	24.9"
Length.....	33.0"
Oscillation.....	± 8°
Angle.....	± 30°
Cutting Edge (reversible).....	0.5" x 6"
Cylinders.....	3
Skid Shoes.....	Adjustable


Part Number	Description	Attachment	SLP in US \$
(5600, 5610) (UW56, UW53) 6905884	80" Dozer Blade, 6-WAY..... (Work Machine must be equipped with a 7-Pin Attachment Control Kit) (A 14-Pin T-Harness Kit is required when used on work machine equipped with a 14-Pin Attachment Control Kit – See Page 1)		\$7,816.00

Destination Charge/Fuel Surcharge

Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
Dozer Blade.....	Adjust shoes.....	0.50
Attachment Control Kit.....		See page 1

Dumping Hopper Bobcat Work Machine Attachment

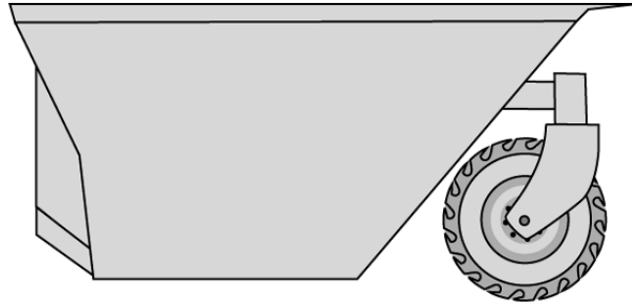

Quick Specs

	<u>Model 10</u>
Operating Weight.....	665 lbs
Height.....	40"
Length.....	83"
Width.....	36"
Capacity - Struck.....	25.7 cu. ft.
Capacity - Heaped.....	29.7 cu. ft.

Part Number	Description	Attachment	SLP in US \$
(5600, 5610) (UW56, UW53) 6727275	Model 10 Dumping Hopper (Approved for use with 5600 s/n A00211001 & above, 5600 s/n A00311001 & above, 5600 s/n A0W111001 & above, 5600 s/n A94Y11001 & above, 5610 A7Y711001 & above and 5610 APFB11001 & above) (Must also order mounting frame bracket p/n 6729483) (Includes 8.5 x 12 Bobcat Heavy Duty Tire. Tire is not installed on Dumping Hopper.)		\$4,510.00

Part Number	Description	Dealer Installed Accessories - Order From Parts
-------------	-------------	---

For current Dealer Installed Accessories pricing, reference BobQuote or Dealer Parts Department.


6729483	Mounting Frame Bracket.....	Parts	\$_____
---------	-----------------------------	-------	---------

Destination Charge/Fuel Surcharge	
Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.	

Attachment	Assembly Required	Installation Time (Hours)
Dumping Hopper.....	Install tires.....	0.50

Flail Cutter

Bobcat Work Machine Attachment

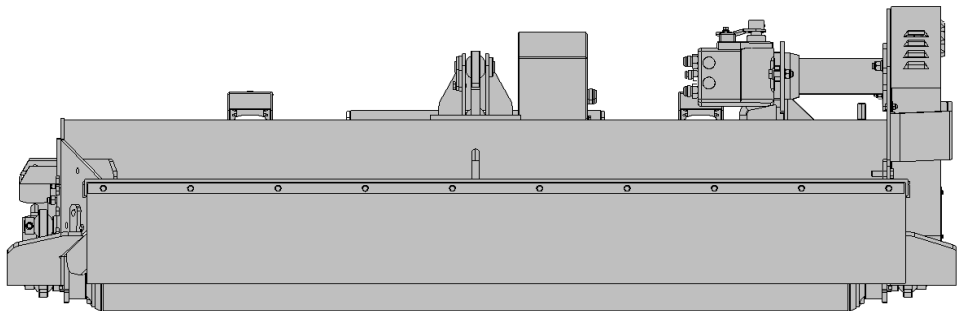

Quick Specs

Operating Weight.....	1,640 lbs
Cutting Width.....	78"
Cutting Height.....	1.5" – 3"
Overall Width.....	91"
Flow.....	17 – 40 gpm
Hammers.....	21
Cutting Capacity.....	Brush material up to 3" in diameter
Blade Tip Speed.....	8200 ft./min. @ 2000 RPM
	9000 ft./min. @ 2200 RPM

Part Number	Description	Attachment	SLP in US \$
(5600, 5600H, 5610) (UW56, UW56H, UW53)			
7101894	FC200 Flail Cutter.....		\$17,579.00


Destination Charge/Fuel Surcharge

Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
Flail Cutter.....	Install tires.....	0.50

Grader

Bobcat Work Machine Attachment

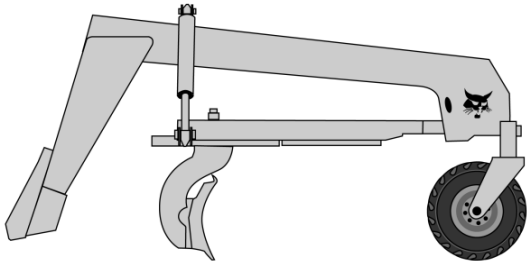

Quick Specs

	<u>84" Grader</u>
Operating Weight.....	1375 lbs
Width of Moldboard.....	84"
Width of Moldboard Fully Angled.....	76.1"
Moldboard Angle (Right or Left).....	± 25°
Blade Offset (Right or Left).....	± 12"(manual)
Bolster Oscillation.....	± 25°
Grader Control Valve.....	3 spool electric solenoid control
Moldboard Cutting Edge (reversible).....	½" x 6"
Cylinders.....	3

Part Number	Description	Attachment	SLP in US \$
(5600, 5610) (UW56, UW53)			
6906480	Grader, 84"		\$13,909.00
	(Work Machine must be equipped with a 7-Pin Attachment Control Kit) (A 14-Pin T-Harness Kit is required when used on work machine equipped with a 14-Pin Attachment Control Kit – See Page 1)		


Destination Charge/Fuel Surcharge

Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.


Attachment	Assembly Required	Installation Time (Hours)
Grader.....	Assemble cylinder to moldboard.....	0.25

Grapple, Industrial

Bobcat Work Machine Attachment



Industrial Bucket Grapple



Industrial Fork Grapple

Quick Specs

	<u>62" Bkt.</u>	<u>68" Bkt.</u>	<u>66" Fork</u>
Operating Weight.....	884 lbs	922 lbs	937 lbs
Grapple Width.....	62"	68"	66.9"
# of Teeth - Factory.....	N/A	N/A	7
# of Teeth - Possible.....	N/A	N/A	13


Part Number	Description	Attachment	SLP in US \$
(5600, 5610) (UW56, UW53)			
7483067	62" Industrial Bucket Grapple..... (Bolt-On Cutting Edge included)		\$4,934.00
7483069	68" Industrial Bucket Grapple..... (Bolt-On Cutting Edge included)		\$5,132.00
7488273	66" Industrial Fork Grapple, with 7 teeth.....		\$5,930.00

Destination Charge/Fuel Surcharge


Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
Industrial Grapple.....	Install port relief on loader.....	0.75

Grapple, Utility Bobcat Work Machine Attachment

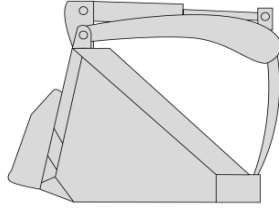

Utility Grapple with Bucket



Utility Grapple with Forks

Quick Specs

	<u>55" Utility - C/I</u>	<u>55" Utility - GP</u>
Operating Weight.....	243 lbs	180 lbs
Grapple Width.....	55"	55"
# of Tines - Factory.....	4	4
# of Tines - Possible.....	8	8

Part Number	Description	Attachment	SLP in US \$
(5600, 5610) (UW56, UW53)			
7176977	Grapple, 55" Utility – C/I..... (Fits 60 – 72" Utility Forks)		\$2,329.00
7176783	Grapple, 55" Utility - GP..... (Fits 62", 68" and 74" General Purpose buckets) (Must also order Grapple stop kit, p/n 7120201 or 6818369)		\$2,300.00

Part Number	Description	Dealer Installed Accessories - Order From Parts
-------------	-------------	---

For current Dealer Installed Accessories pricing, reference BobQuote or Dealer Parts Department.

7120201	Grapple Stop Kit..... (Use with grapple p/n 6725444, 7125371 and 7176783) (Not required with grapple p/n 7176977) (Use with 5600 s/n A00211001 & above and 5600T s/n A00311001 & above) (Use with 5600T s/n A0W111001 & above, 5610 s/n A7Y711001 & above) (Installed between Utility Grapple tower and Work Machine auxiliary coupler manifold)	Parts	\$_____
6818369	Grapple Stop Kit..... (Use with grapple p/n 6725444, 7125371 and 7176783) (Not required with grapple p/n 7176977) (Use with 5600 s/n 424811001 & above and 5600T s/n 424711001 & above) (Installed between Utility Grapple tower and Work Machine auxiliary coupler manifold)	Parts	\$_____

Note: It is required that a port relief be installed for use with the grapples. Installation instructions are included in the Operation Manual. Order the following from Bobcat Parts:
6686242 Port relief (3500 psi)


Destination Charge/Fuel Surcharge

Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
Utility Grapple.....	Assemble grapple and bolt to utility fork or bucket.....	2.50
Grapple Stop.....	Install between grapple tower and coupler manifold.....	0.50

Landplane

Bobcat Work Machine Attachment

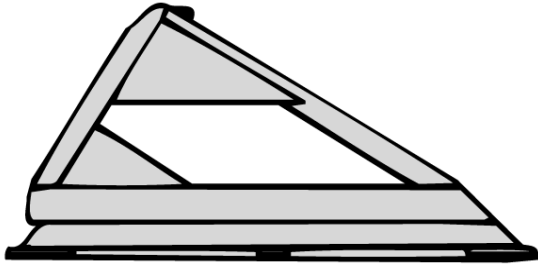

Quick Specs

	<u>72" Deluxe</u>
Operating Weight.....	680 lbs
Length.....	51.5"
Width.....	73"
Height.....	20.9"
Working Depth-Scarifier.....	3.5"
Cutting Edge.....	0.5" x 6"

Part Number	Description	Attachment	SLP in US \$
(5600, 5610) (UW56, UW53)			
6906150	72" Deluxe Landplane Leveling Attachment.....		\$3,084.00
	(Includes expanded metal grate, scarifier assembly, teeth and respective hardware)		


Destination Charge/Fuel Surcharge

Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
Landplane.....	None.....	-

Landscape Rake

Bobcat Work Machine Attachment

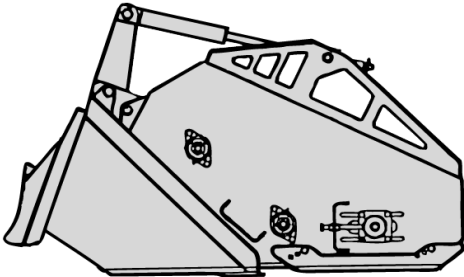

Quick Specs

Operating Weight.....

1109 lbs

Working Width.....

60"

Overall Width.....

66.6"

of Tooth Bars.....

12

of Teeth (total).....

384

Bucket Capacity.....

12.1 cu. ft.


Part Number	Description	Attachment	SLP in US \$
(5600, 5610) (UW56, UW53)			
6709107	5B Landscape Rake.....		\$11,273.00
	(Not approved for A-Series or B-Series) (Approved for use with 5600 s/n A00211001 & above, 5600 s/n A00311001 & above, 5600 s/n A0W111001 & above, 5600 s/n A94Y11001 & above, 5610 A7Y711001 & above and 5610 APFB11001 & above)		

Destination Charge/Fuel Surcharge

Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
Landscape Rake.....	Install dump restrictor on loader..... (One of each shipped with rake)	2.00

Mower
Bobcat Work Machine Attachment

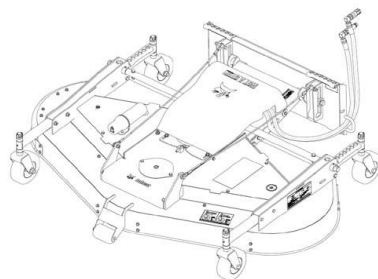

Quick Specs

	<u>72" Mower</u>	<u>90" Mower</u>
Operating Weight.....	880 lbs	990 lbs
Cutting Width.....	71.5"	89.5"
Overall Width.....	76"	94"
Overall Length.....	68"	75"
Cutting Height Range.....	2"—5.5"	2"—5.5"
Flow Range.....	15—22 gpm	15—22 gpm
Number of Blades.....	3	3
Shut-off Travel.....	8.5"	8.5"
Blade Tip Speeds.....	11,251 ft/min @ 15 GPM 15,002 ft/min @ 20 GPM 16,502 ft/min @ 22 GPM	11,026 ft/min @ 15 GPM 14,702 ft/min @ 20 GPM 16,172 ft/min @ 22 GPM

Part Number	Description	Attachment	SLP in US \$
(5600, 5610) (UW56, UW53)			
7144850	72" Mower.....		\$7,871.00
7143993	90" Mower.....		\$8,612.00

Part Number	Description	Dealer Installed Accessories - Order From Parts
-------------	-------------	---

For current Dealer Installed Accessories pricing, reference BobQuote or Dealer Parts Department.


7144843	Mulch Kit for 72" Mower.....	Parts	\$ ____
7144008	Mulch Kit for 90" Mower.....	Parts	\$ ____
7144844	Side Discharge Kit for 72" Mower.....	Parts	\$ ____
7144009	Side Discharge Kit for 90" Mower.....	Parts	\$ ____

Destination Charge/Fuel Surcharge	
Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.	

Attachment	Assembly Required	Installation Time (Hours)
Side Discharge Kit.....	Install on mower.....	0.50

Pallet Fork, Hydraulic

Bobcat Work Machine Attachment



Quick Specs

Ship Weight (Frame & Forks).....

48"

565 lbs

Fork Width.....4"


Part Number	Description	Attachment	SLP in US \$
6905425	48" Hydraulic Pallet Fork..... (Includes back frame and 2 hydraulically adjustable 48" teeth)		\$3,912.00

Destination Charge/Fuel Surcharge


Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
Hydraulic Pallet Fork.....	None.....	-

Pallet Fork, Standard Bobcat Work Machine Attachment

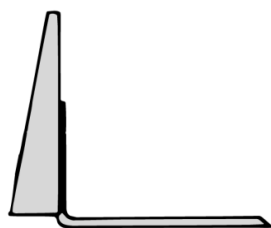

Standard Pallet Fork Teeth and Frame



Bale Forks and Frame

Quick Specs

<u>Frames</u>	<u>Frame Weight</u>	<u>Capacity</u>	<u>Width</u>	<u>Height</u>
Standard Duty.....	122 lb	2500 lb	45.1"	34.3"
Heavy Duty	153 lb	4000 lb	45.1"	34.3"
Severe Duty.....	229 lb	6000 lb	51.5"	34.3"/43.2"

<u>Teeth</u>	<u>Weight Set 2</u>	<u>Length</u>	<u>Width</u>	<u>Height</u>
Standard Duty.....	150 lb	36"	3.94"	21.46"
Heavy Duty 42".....	164 lb	42"	3.94"	21.06"
Heavy Duty 48".....	184 lb	48"	3.94"	21.06"
Severe Duty 42".....	215 lb	42"	3.94"	21.06"
Severe Duty 48".....	238 lb	48"	3.94"	21.06"
Bale Fork.....	119 lb	43.8"	1.42"	21"

Part Number	Description	Attachment	SLP in US \$
-------------	-------------	------------	--------------

A new ordering method will be required for bundles of buckets and pallet forks. Instead of ordering a different part number for a bundled product, you will simply use the single part number and the 'Change Quantity' box in OSS to order the quantity that meets the requirement for a bundle discount. The OSS order system will help step you through it and alert you if the product you are ordering can be bundled, what quantity needs to be ordered to get the discount, and what the discounted price will be.

Pallet Frames

(5600, 5610) (UW56, UW53)

7297499	2.5K Standard Duty Pallet Fork Frame, Less Teeth.....	\$523.00
	(Quantity discounts will be given on invoice to PN 7297499 when ordered in multiples of 10)	
7294305	4K Heavy Duty Pallet Fork Frame, Less Teeth.....	\$635.00
	(Quantity discounts will be given on invoice to PN 7294305 when ordered in multiples of 10)	
46907101	6K Severe Duty Pallet Fork Frame, Less Teeth.....	\$1,014.00
	(Quantity discounts will be given on invoice to PN 46907101 when ordered in multiples of 10)	

Pallet Teeth

7308798	42", 2.5K Standard Duty Pallet Fork Teeth, Set of 2.....	\$406.00
	(Quantity discounts will be given on invoice to PN 7308798 when ordered in multiples of 10 pairs)	
6540183	42" Pallet fork Teeth, set of 2.....	\$460.00
	(Quantity discounts will be given on invoice to PN 6540183 when ordered in multiples of 10 pairs)	
6540182	48", 4K Heavy Duty Pallet Fork Teeth, Set of 2.....	\$470.00
	(Quantity discounts will be given on invoice to PN 6540182 when ordered in multiples of 10 pairs)	
46907123	42", 6K Severe Duty Pallet Fork Teeth, Set of 2.....	\$621.00
	(Quantity discounts will be given on invoice to PN 46907123 when ordered in multiples of 10 pairs)	
46907125	48", 6K Severe Duty Pallet Fork Teeth, Set of 2.....	\$700.00
	(Quantity discounts will be given on invoice to PN 46907125 when ordered in multiples of 10 pairs)	

Bale Forks

(Standard Duty, Heavy Duty, Severe Duty)

6815781	Bale Forks, Set of 2.....	\$1,039.00
---------	----------------------------------	-------------------

Part Number	Description	Attachment Accessories	SLP in US \$
-------------	-------------	------------------------	--------------


(Standard Duty, Heavy Duty, Severe Duty)			
7306978	Brick-Guard Center.....	Parts \$_____	
	(Quantity orders only on PN 7306978 in multiples of 5 only) (Compatible with Standard, Heavy and Severe Duty Frames)		
(Severe Duty)			
7306981	Brick-Guard Extension.....	\$315.00	

Destination Charge/Fuel Surcharge			
Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.			

Attachment	Assembly Required	Installation Time (Hours)
Pallet Fork.....	Install forks on frame.....	0.25

Rock Bucket

Bobcat Work Machine Attachment

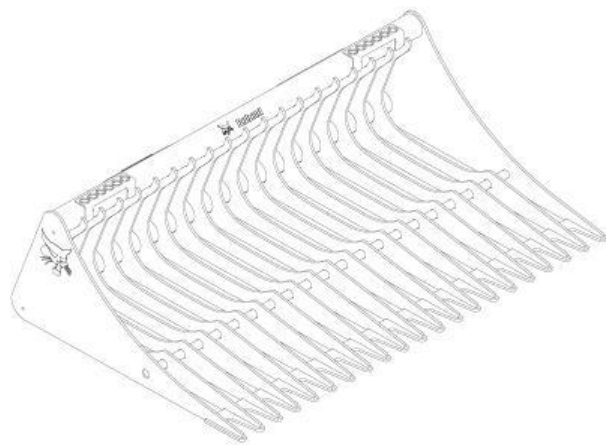

Quick Specs

	<u>62"</u>	<u>68"</u>
Operating Weight.....	558 lbs	605 lbs
Overall Width.....	61.9"	68.6"
Overall Height.....	20.8"	20.8"
Overall Length (Bucket Lip or Bottom of Bucket).....	43.6"	43.6"
Tine Spacing.....	3"	3"
Number of Tines.....	17	19


Part Number	Attachment Description	SLP in US \$
(5600, 5610) (UW56, UW53)		
7185941	62" Rock Bucket.....	\$2,583.00
7185943	68" Rock Bucket.....	\$2,700.00

Destination Charge/Fuel Surcharge

Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
Rock Bucket.....	None.....	-

Sand/Salt Spreader
Bobcat Work Machine Attachment

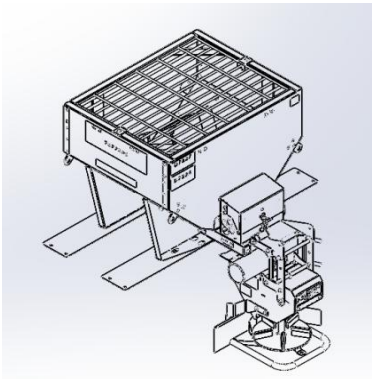

Quick Specs

Operating Weight (empty).....	212 lbs
Operating Weight.....	1292 lbs
Height.....	34"
Width.....	38"
Length.....	52.75"
Hopper Capacity.....	13.45 cu. ft.
Spreading Pattern.....	up to 30'
Speed Control.....	Variable Speed Control Dial
Spinner Wheel.....	12"

Part Number	Description	Attachment	SLP in US \$
(UW56) 7453395	SP13 Sand/Salt Spreader..... (Includes controller, wire harness and all necessary mounting hardware) (Box Pocket brackets (7190021 x 2) and instructions (6989620ENUS) are required for installation)		\$6,938.00


Dealer Installed Accessories - Order From Parts			
Part Number	Description		
<i><u>For current Dealer Installed Accessories pricing, reference BobQuote or Dealer Parts Department.</u></i>			
7455397	V Inverted Kit.....	Parts	\$ _____
7455399	Work Light Kit.....	Parts	\$ _____
7455400	Strobe Light Kit.....	Parts	\$ _____
7455401	Vibrator Kit.....	Parts	\$ _____
7455402	Spill Guard Kit.....	Parts	\$ _____
7455398	Tarp.....	Parts	\$ _____

Destination Charge/Fuel Surcharge	
Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.	

Attachment	Assembly Required	Installation Time (Hours)
Sand/Salt Spreader.....	Install spreader, control kit and harness.....	4.00
Rear spreader light.....	Mount taillight assemblies.....	1.00

Scraper

Bobcat Work Machine Attachment

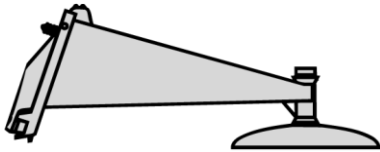

Quick Specs

Operating Weight..... 172 lbs
Height..... 19"
Width..... 45"
Length..... 55"
Disk Diameter..... 22"


Part Number	Description	Attachment	SLP in US \$
(5600, 5610) (UW56, UW53) 6675211	Scraper.....		\$1,654.00

Destination Charge/Fuel Surcharge

Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
Scraper.....	None.....	-

Seeder
Bobcat Work Machine Attachment

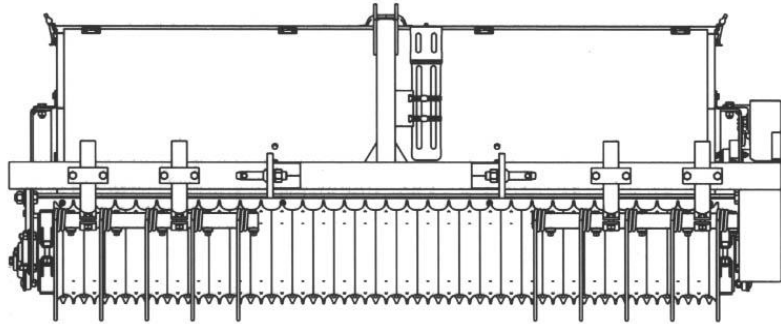

Quick Specs

Weight (empty)..... 1,300 lbs
Weight (full)..... 1,425 lbs
Height..... 44.0"
Overall Width..... 88.0"
Working Width..... 72.0"
Length..... 43.0"
Hopper Capacity..... 4.0 bushels

Part Number	Description	Attachment	SLP in US \$
(5600, 5610) (UW56, UW53) 7167712	Seeder, 72", 3PT Mounting..... (Must also order Bob-Tach adapter if used on front of Work Machine equipped with a Bob-Tach)		\$9,832.00


Part Number	Description	Factory Installed Options	SLP in US \$
7167758	Bob-Tach Adapter..... (Allows Seeder to mount on Bob-Tach equipped machines)		\$1,045.00

Part Number	Description	Dealer Installed Accessories - Order From Sales	SLP in US \$
7167759	Bob-Tach Adapter..... (Allows Seeder to mount on Bob-Tach equipped machines)		\$919.00

Destination Charge/Fuel Surcharge
Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
Seeder.....	None.....	-

Snow Blade Bobcat Work Machine Attachment



Quick Specs

	<u>72"</u>	<u>84"</u>	<u>96"</u>	<u>86" HD</u>	<u>96" HD</u>
Operating Weight.....	590 lbs	620 lbs	660 lbs	809 lbs	867 lbs
Width.....	72"	84"	96"	86"	96"
Height.....	28"	28"	28"	28.4"	28.4"
Working Width (Fully Angled).....	63"	73"	83"	75"	83"
Steel Cutting Edge.....	.375" x 6"	.375" x 6"	.375" x 6"	.5" x 6"	.5" x 6"
Cylinders.....	2	2	2	1	1
Trip Springs.....	4	4	4	4	4
Optional Rubber Cutting Edge.....	1" x 6"	1" x 6"	1" x 6"	1" x 6"	1" x 6"

Part Number	Description	Attachment	SLP in US \$
(5600, 5610) (UW56, UW53)			
6905156	72" Snow Blade (with hydraulic angle).....		\$3,895.00
6716836	84" Snow Blade (with hydraulic angle).....		\$4,155.00
6716838	96" Snow Blade (with hydraulic angle).....		\$4,504.00
7207861	86" Snow Blade – Heavy Duty (with hydraulic angle).....		\$5,583.00
7207862	96" Snow Blade – Heavy Duty (with hydraulic angle).....		\$5,916.00

Part Number	Description	Dealer Installed Accessories - Order From Sales	SLP in US \$
6716834	End Wing Kit..... (Converts 84" & 96" Snow Blades into Snow Pushers) (Does not fit 72" Snow Blade) (Ship Weight 95 lbs.)		\$694.00

Part Number		Dealer Installed Accessories - Order From Parts	
Description			

For current Dealer Installed Accessories pricing, reference BobQuote or Dealer Parts Department.

6905158	Rubber Wear Edge Kit, 72" (Ship Weight 25 lbs.)	Parts	\$_____
6905400	Rubber Wear Edge Kit, 84" (Ship Weight 30 lbs.)	Parts	\$_____
6905401	Rubber Wear Edge Kit, 96" (Ship Weight 35 lbs.)	Parts	\$_____

Note: Certain applications may cause premature wear of the Rubber Wear Edge.


6905155	Replacement Cutting Edge, 72" * (Ship Weight 44 lbs.)	Parts	\$_____
6673634	Replacement Cutting Edge, 84" * (Ship Weight 51 lbs.)	Parts	\$_____
6673606	Replacement Cutting Edge, 96" * (Ship Weight 59 lbs.)	Parts	\$_____

*Additional hardware for replacement cutting edges is needed.

Destination Charge/Fuel Surcharge	
Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.	

Attachment		Assembly Required	Installation Time (Hours)
Snow Blade.....		Adjust shoes & install edge indicators.....	0.25
End wing kit.....		Install wings.....	0.25
Replacement cutting edge kits.....		Bolt on edge.....	0.50

Snow Pusher Bobcat Work Machine Attachment

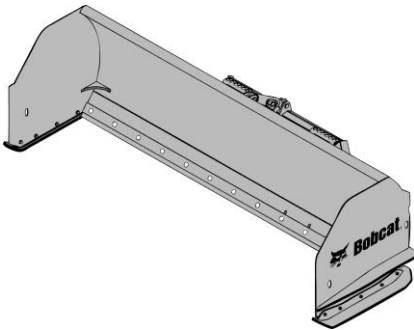

Quick Specs

	<u>8 Foot</u>
Operating Weight.....	1122 lbs
Overall Width.....	102"
Working Width.....	94.6"
Length.....	56.2"
Height.....	37.8"
Cutting Edge.....	1.5" x 8" Rubber
Skid Shoes.....	.75" x 5" AR400
Color.....	Orange
	<u>Float</u>
Vertical.....	2.3"
Tilt.....	12 degrees
Oscillation.....	+/- 4.5 degrees

Part Number	Description	Attachment	SLP in US \$
-------------	-------------	------------	--------------


(5600, 5610) (UW56, UW53)	7113767 Snow Pusher, 8'.....	\$4,640.00
---------------------------	-----------------------------------	------------

Destination Charge/Fuel Surcharge Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
------------	-------------------	---------------------------

Snow Pusher.....	None.....	-
------------------	-----------	---

Snow Pusher Pro
Bobcat Work Machine Attachment

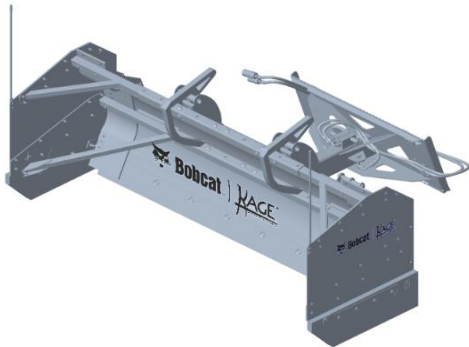

Quick Specs

	<u>72"</u>
Operating Weight.....	1272 lbs
Overall Width.....	80"
Working Width.....	72"
Length (includes interface).....	70.7"
Height.....	40"
Cutting Edge (High Carbon Steel).....	5/8" x 6"
Skid Shoes (Poly).....	.36" x 9.75" x 1.5"
Number of Trip Springs.....	4
Color.....	Orange
<u>Float</u>	
Tilt.....	35 degrees
Oscillation.....	+/- 6 degrees

Part Number	Description	Attachment	SLP in US \$
(5600, 5610) (UW56, UW53)			
7406869	72" Snow Pusher Pro.....		\$10,258.00

Part Number	Description	Dealer Installed Accessories - Order From Parts	
7396909	72" Steel Cutting Edge..... (Includes hardware)	Parts	\$____
7396913	72" Poly Cutting Edge..... (Includes hardware)	Parts	\$____
7396917	Curb Guard Kit..... (Includes hardware)	Parts	\$____
7396918	Backdrag Kit..... (Includes hardware)	Parts	\$____
7396919	Poly Skid Kit..... (Includes hardware)	Parts	\$____


Destination Charge/Fuel Surcharge
Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
Snow Pusher Pro.....	None.....	-


Snow V-Blade Bobcat Work Machine Attachment



Blade in "V" Configuration



Blade in "Scoop" Configuration



Blade in "Angled" Configuration

Quick Specs

	<u>60"</u>	<u>72"</u>	<u>84"</u>	<u>96"</u>
Operating Weight.....	660 lbs	738 lbs	779 lbs	824 lbs
Operating Weight with Oscillating kit.....	N/A	972 lbs	1013 lbs	1058 lbs
<u>Width:</u>				
V-Configuration.....	54"	64.5"	75"	85.5"
Scoop-Configuration.....	53"	63"	74"	84"
30° Angle-Configuration.....	54"	64"	75"	85"
Straight-Configuration.....	62"	74"	86"	98"
Height with Blade Extension.....	28.5"	32.8"	32.8"	32.8"
Length.....	40"	47.3"	47.3"	47.3"
Oscillation (with flotation kit).....	N/A	+/- 10	+/- 10	+/- 10

Part Number	Description	Attachment	SLP in US \$
(5600, 5610) (UW56, UW53)			
7104861	60" Snow V-Blade.....		\$6,388.00
	(Work Machine must be equipped with a 7-Pin Attachment Control Kit) (Blade is equipped with fingertip 7-Pin Control) (Adjustable blade width from 53-60 inches)		
6958576	72" Snow V-Blade.....		\$6,714.00
	(Work Machine must be equipped with a 7-Pin Attachment Control Kit) (A 14-Pin T-Harness Kit is required when used on work machine equipped with a 14-Pin Attachment Control Kit – See Page 1)		
6958577	84" Snow V-Blade.....		\$7,037.00
	(Work Machine must be equipped with a 7-Pin Attachment Control Kit) (A 14-Pin T-Harness Kit is required when used on work machine equipped with a 14-Pin Attachment Control Kit – See Page 1)		
6958578	96" Snow V-Blade.....		\$7,360.00
	(Work Machine must be equipped with a 7-Pin Attachment Control Kit) (A 14-Pin T-Harness Kit is required when used on work machine equipped with a 14-Pin Attachment Control Kit – See Page 1)		


Part Number	Description	Dealer Installed Accessories - Order From Parts	
<u>For current Dealer Installed Accessories pricing, reference BobQuote or Dealer Parts Department.</u>			
6958664	60" Rubber Cutting Edge Kit.....	Parts	\$_____
6958665	72" Rubber Cutting Edge Kit.....	Parts	\$_____
6958666	84" Rubber Cutting Edge Kit.....	Parts	\$_____
6958667	96" Rubber Cutting Edge Kit.....	Parts	\$_____

Destination Charge/Fuel Surcharge

Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
Snow V-Blade.....	None.....	-
Attachment control kit.....		See Page 1

Snowblower Bobcat Work Machine Attachment

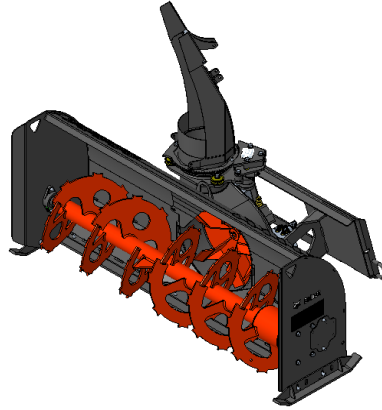

Quick Specs

	<u>SB32 x 60"</u>	<u>SB32 x 68"</u>	<u>SB32 x 74"</u>	<u>SB32 x 80"</u>
Chute Rotation.....	270°	270°	270°	270°
Deflector Control.....	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Throw Distance.....	Up to 40'	Up to 40'	Up to 40'	Up to 40'
Flow Range.....	13-31 GPM	13-31 GPM	13-31 GPM	13-31 GPM
Fan Diameter.....	19.5"	19.5"	19.5"	19.5"
Auger Diameter.....	20"	20"	20"	20"
Length.....	61.5"	69.5"	75.5"	81.5"
Width.....	45"	45"	45"	45"
Intake Height.....	33"	33"	33"	33"
Max Pressure.....	3400 psi	3400 psi	3400 psi	3400 psi
Operating Weight.....	920 lbs	941 lbs	981 lbs	1016 lbs

SB32 Hydraulic Motor Packages

100cc Motor Package.....	18-22 gpm
130cc Motor Package.....	22-28 gpm


Part Number	Description	SB32 Snowblower	SLP in US \$
(5600, 5600H, 5610) (UW53, UW56, UW56H)			
M7046	SB32 x 60" Snowblower.....		\$7,318.00
M7046-R01-C02	100cc Motor Package..... (5600)(UW56)		\$1,098.00
M7046-R01-C03	130cc Motor Package..... (5600H, 5610)(UW53, UW56H)		\$1,147.00
(5600, 5600H, 5610) (UW53, UW56, UW56H)			
M7047	SB32 x 68" Snowblower.....		\$7,498.00
M7047-R01-C02	100cc Motor Package..... (5600)(UW56)		\$1,098.00
M7047-R01-C03	130cc Motor Package..... (5600H, 5610)(UW53, UW56H)		\$1,147.00

(5600, 5600H, 5610) (UW53, UW56, UW56H)		
M7045	SB32 x 74" Snowblower.....	\$7,784.00
M7045-R01-C02	100cc Motor Package..... (5600)(UW56)	\$1,098.00
M7045-R01-C03	130cc Motor Package..... (5600H, 5610)(UW53, UW56H)	\$1,147.00
(5600, 5600H, 5610) (UW53, UW56, UW56H)		
M7048	SB32 x 80" Snowblower.....	\$8,006.00
M7048-R01-C02	100cc Motor Package..... (5600)(UW56)	\$1,098.00
M7048-R01-C03	130cc Motor Packag..... (5600H, 5610)(UW53, UW56H)	\$1,147.00

Destination Charge/Fuel Surcharge		
Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.		

Attachment	Assembly Required	Installation Time (Hours)
Snowblower.....	None.....	-

Sod Layer Bobcat Work Machine Attachment



Quick Specs


Operating Weight.....	596 lbs
Length.....	49.1"
Width (maximum overall).....	73.0"
Height.....	31.0"
Sod Roll Widths.....	24.0" – 48.0"
Maximum Diameter Sod Roll.....	50.0"
Arm Cylinders (2).....	2.0" X 1.0" X 18.5" Stroke
Relief Vaule Setting.....	400 psi

Part Number	Description	Attachment	SLP in US \$
(5600, 5610) (UW56, UW53)			
6906783	Sod Layer.....		\$5,577.00
	(Not approved for A-Series or B-Series) (Approved for use with 5600 s/n A00211001 & above, 5600 s/n A00311001 & above, 5600 s/n A0W111001 & above, 5600 s/n A94Y11001 & above, 5610 A7Y711001 & above and 5610 APFB11001 & above)		

Destination Charge/Fuel Surcharge Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
Sod Layer.....	None.....	-

Soil Conditioner Bobcat Work Machine Attachment

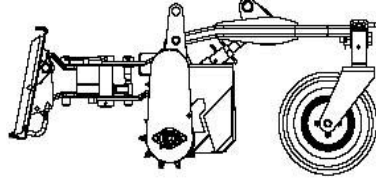

Quick Specs

	<u>72-in Man.</u>	<u>72-in Hyd.</u>	<u>72-in HF.</u>	<u>84-in Hyd.</u>	<u>84-in HF.</u>
Overall Length.....	67.9"	67.9"	67.9"	67.9"	67.9"
Overall Width.....	86.2"	86.2"	86.2"	98.2"	98.2"
Working Width – Fully Angled.....	65.0"	65.0"	65.0"	76.0"	76.0"
Degree of Angle Left or Right.....	25°	25°	25°	25°	25°
Number of Teeth.....	121	121	121	141	141
Operating Weight.....	1110 lbs.	1110 lbs.	1110 lbs.	1268 lbs.	1269 lbs.
Hydraulic Requirements.....	13-37 gpm	13-37 gpm	25-37 gpm	18-37 gpm	30-37 gpm
Tires.....	Pneumatic	Foam-Filled	Foam-Filled	Foam-filled	Foam-filled
Float or Lock Position.....	Both	Both	Both	Both	Both
Depth Adjustment.....	Manual	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Angle Adjustment.....	Manual	Hydraulic	Hydraulic	Hydraulic	Hydraulic


Part Number	Description	Attachment	SLP in US \$
(5600, 5600H, 5610) (UW56, UW56H, UW53)			
6906513	72" Soil Conditioner, Manual Angle.....		\$11,837.00
7135945	72" Soil Conditioner, Hydraulic Angle and Depth..... (Loader must be equipped with an Attachment Control Kit)		\$13,541.00
7135946	84" Soil Conditioner, Hydraulic Angle..... (Loader must be equipped with an Attachment Control Kit)		\$14,319.00
(5600H, 5610) (UW56, UW56H, UW53)			
7135944	72" Soil Conditioner, High Flow Hydraulic Angle and Depth..... (Loader must be equipped with an Attachment Control Kit)		\$14,008.00
7135947	84" Soil Conditioner, High Flow Hydraulic Angle and Depth..... (Loader must be equipped with an Attachment Control Kit)		\$15,220.00

Destination Charge/Fuel Surcharge

Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
Soil Conditioner.....	None.....	-
Soil Conditioner - hydraulic angle.....	None.....	-
Attachment Control Kit.....		See Page 1

Spreader
Bobcat Work Machine Attachment



Quick Specs

Operating Weight with Loader Mount (empty).....	387 lbs
Height.....	40.9"
Width.....	54.4"
Hopper Capacity	
Top of Hopper.....	9.6 Cu. ft.
Bottom of Grate.....	7.6 Cu. ft.
Spreading Pattern.....	18.4 @ 1500 RPM
Spreading Pattern.....	22.6 @ 2000 RPM
Spreading Pattern.....	28.4 @ 2500 RPM
Speed Control.....	Dial control
Motor.....	Hydraulic
Spinner Wheel.....	18" diameter
Maximum Hydraulic Flow.....	22 GPM

Part Number	Description	Attachment	SLP in US \$
(5600, 5610) (UW56, UW53)			
7157284	HS8 Spreader.....		\$5,027.00


Part Number	Description	Dealer Installed Accessories - Order From Parts	
7157412	Sidewalk Kit – HS8.....	Parts	\$____
	(Limits spread pattern to the width of a 29" or 37" dependent mounting location used)		

Destination Charge/Fuel Surcharge
Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
Spreader.....	None.....	-

Stump Grinder

Bobcat Work Machine Attachment

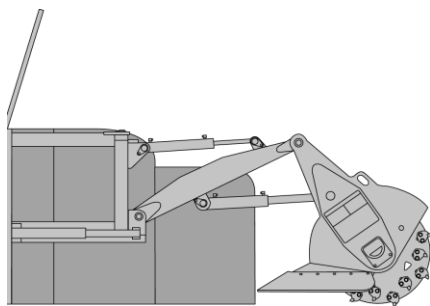

Quick Specs


	<u>SG60</u>
Operating Weight.....	980 lbs
Flow Range.....	17-32 gpm
Overall Length.....	45"
Overall Transport Length.....	65.8"
Overall Height.....	59.4"
Wheel Diameter.....	27"
Number of Teeth.....	32
Grinder Reach @ Ground Level.....	74"
Maximum Cutting Height.....	32"
Maximum Cutting Depth.....	15"
Maximum Cutting Arc.....	80°

Part Number	Description	Attachment	SLP in US \$
(5600, 5600H, 5610) (UW56, UW56H, UW53)			
6808034	SG60 Stump Grinder.....		\$13,002.00
	(Work Machine must be equipped with a 7-Pin Attachment Control Kit) (A 14-Pin T-Harness Kit is required when used on work machine equipped with a 14-Pin Attachment Control Kit – See Page 1)		

Destination Charge/Fuel Surcharge
Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
Stump Grinder.....	None.....	-
Attachment Control Kit.....		See Page 1

Sweeper Bobcat Work Machine Attachment

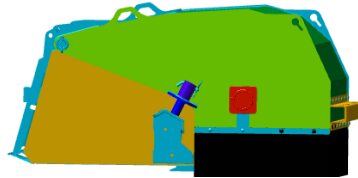

Quick Specs

Operating Weight.....	888 lbs
Sweep Width.....	60"
Overall Attachment Width.....	66
Bucket Capacity.....	8.7 cu. Ft.
Broom Diameter.....	26.3"
Bristle Sections (Included).....	30
Bristle Material.....	Replaceable Polypropylene sections (steel available)
Cutting Edge (Repl. Steel).....	5/8" x 6"
Broom RPM @ 12 GPM.....	258
Hydraulic Flow Range.....	16.0-23.0 GPM
Travel.....	Forward/Reverse

Part Number	Description	Attachment	SLP in US \$
(5600, 5610) (UW56, UW53)			
7418328	60" Sweeper.....		\$6,850.00
	(Not approved for A-Series or B-Series) (Approved for use with 5600 s/n A00211001 & above, 5600 s/n A00311001 & above, 5600 s/n A0W111001 & above, 5600 s/n A94Y11001 & above, 5610 A7Y711001 & above and 5610 APFB11001 & above)		

Part Number	Description	Dealer Installed Accessories - Order From Sales	SLP in US \$
7419388	Gutter Brush.....		\$2,845.00
	(Add-on to the 60" Sweepers) (Includes hoses, couplers, steel bristles, mounting frame, hardware and control valve) (Estimated install time 2 hours) (Ship Weight 150 lbs.)		

Part Number	Description	Dealer Installed Accessories - Order From Parts
-------------	-------------	---

For current Dealer Installed Accessories pricing, reference BobQuote or Dealer Parts Department.


7328134	Bolt-On Cutting Edge, 60"	Parts	\$ ____
	(Hardware not included) (Estimated install time 1.5 hours)		

Destination Charge/Fuel Surcharge

Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
Sweeper, 60"	Adjust side bolts (2) for 3/4" clearance	0.25
	(Shipped with no clearance)	
Gutter Brush.....	Install.....	2.00

Three-Point Hitch Adapter
Bobcat Work Machine Attachment



Quick Specs

Operating Weight..... 272 lbs
Mounting Frame..... Mounts to category "I and II" Three-Point Hitch Implements that meet the ASAE standard for quick hitch.
Overall Width..... 46"

Part Number	Description	Attachment	SLP in US \$
-------------	-------------	------------	--------------

(5600, 5610) (UW56, UW53)			
7110394	Three-Point Hitch Adapter, Category "I and II" (Quick-tach connection to Three-Point Hitch implements to convert to Bob-Tach™) (Includes 2" receiver for moving trailers)		\$1,346.00

Destination Charge/Fuel Surcharge


Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
------------	-------------------	---------------------------

Sweeper, 60" None..... -

Tiller

Bobcat Work Machine Attachment

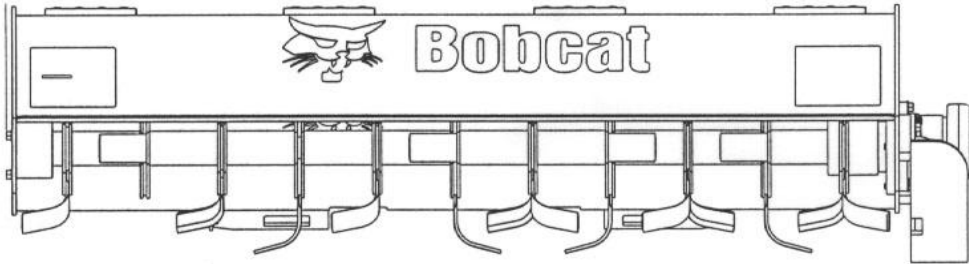

Quick Specs

	<u>62"</u>	<u>76"</u>
Operating Weight.....	660 lbs	749 lbs
Working Width.....	62.1"	75.4"
Overall Width.....	70.8"	84.4"
Tines.....	36	44
Working Depth.....	6" maximum	6" maximum
Tine Rotation.....	Bi-rotational	Bi-rotational
Drive.....	Direct Drive	Direct Drive
Travel Direction.....	Forward/Reverse	Forward/Reverse
Flow Range.....	17-40 GPM	17-40 GPM
Skid Shoe.....	Optional	Optional


Part Number	Description	Attachment	SLP in US \$
(5600, 5600H, 5610) (UW56, UW56H, UW53)			
7104371	62" Rotary Tiller.....		\$6,672.00
(5600*, 5600H, 5610) (UW56, UW56H, UW53)			
7102125	76" Rotary Tiller.....		\$7,875.00
	(*Not approved on A-Series 5600, s/n prefix 5205)		

Dealer Installed Accessories - Order From Parts	
Part Number	Description
<i><u>For current Dealer Installed Accessories pricing, reference BobQuote or Dealer Parts Department.</u></i>	
7280548	Tiller Skid Shoes for all models..... Parts \$____ (0.5 hour assembly time)

Destination Charge/Fuel Surcharge	
Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.	

Attachment	Assembly Required	Installation Time (Hours)
Tiller.....	None.....	-
Tiller Skid Shoe.....	Bolt onto Tiller.....	0.50

Tilt-Tatch Bobcat Work Machine Attachment
--

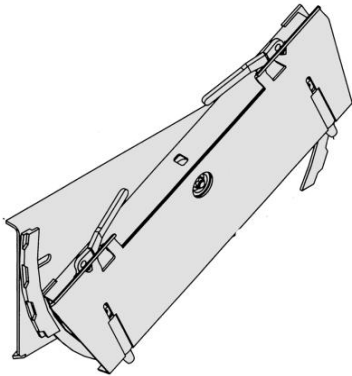

Quick Specs

Operating Weight..... 320 lbs
Height..... 20.4"
Width..... 48"
Length..... 4.3"
Oscillation..... ± 15°
Cylinders..... 1

Part Number	Description	Attachment	SLP in US \$
-------------	-------------	------------	--------------

(5600, 5610) (UW56, UW53)			
7101600	Tilt-Tatch.....		\$3,493.00
	(Interface between the work machine's Bob-Tach and non-hydraulic attachments)		

Note: Use of Tilt-Tatch will reduce Operating Capacity and Tip Load by approximately 20%. See the Tilt-Tatch Operator's Manual for New Load Ratings.
Note: Tilt-Tatch can be used with non-hydraulic attachments only.

Part Number	Description	Dealer Installed Accessories - Order From Parts	
-------------	-------------	---	--

For current Dealer Installed Accessories pricing, reference BobQuote or Dealer Parts Department.


7101857	Tilt-Tatch Rebuild Kit.....	Parts	\$____
	(The bolt-on rebuild kit allows customers with high usage or excessive wear applications to replace high wear items without the use of a cutting torch and welder.)		

Destination Charge/Fuel Surcharge
Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
------------	-------------------	---------------------------

Tilt-Tatch.....	None.....	-
-----------------	-----------	---

Trencher Bobcat Work Machine Attachment

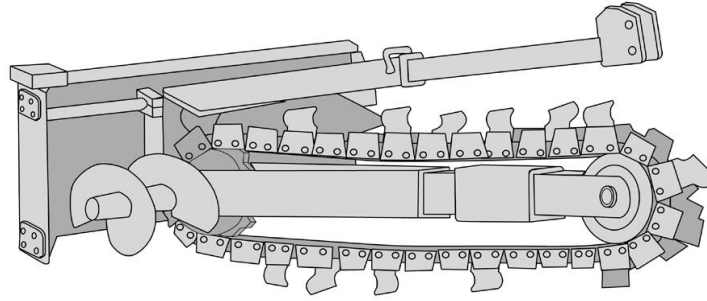

Quick Specs

	<u>LT213</u>
Operating Weight (without teeth).....	725 lbs
Flow Range.....	11-18 gpm
Maximum Operating Pressure.....	3300 psi
Frame Width (std. equipment).....	56"
Trenching Widths Available.....	4" to 8"
Side Shift Travel.....	23.1"
Auger Diameter.....	12"
Auger Clearance.....	13.8-15.8"
Dig Depth @ 60 degrees.....	3'
Overall Length.....	74"
Standard Boom Length.....	52.5"

Part Number	Description	LT213 Trencher Attachment	SLP in US \$
-------------	-------------	---------------------------	--------------

(5600, 5610) (UW56, UW53)

M7013	LT213 Trencher.....	\$5,825.00
	(Includes 3' depth, manual sideshift, trench cleaner) (Can only order one factory installed chain option per trencher model)	

LT213 Chain Configuration Options (Factory Installed) *Chains are 1.654" Double Standard (DS) Anti-Back Flex (ABF)*

M7013-R01-C02	3' x 4" Cup Teeth, Single Standard Pattern.....	\$630.00
M7013-R01-C04	3' x 6" Cup Teeth, Single Standard Pattern.....	\$672.00
M7013-R01-C01	3' x 4" Cup Teeth, Double Standard Pattern.....	\$717.00
M7013-R01-C03	3' x 4" Cup & Carbide Teeth, Double Standard Pattern.....	\$1,468.00
M7013-R01-C06	3' x 4" Shark/Cup Teeth in Double Standard Pattern.....	\$1,181.00
M7013-R01-C07	3' x 6" Shark/Cup Teeth in Double Standard Pattern.....	\$1,373.00

Part Number	Description	Dealer Installed Accessories - Order From Sales	SLP in US \$
-------------	-------------	---	--------------

LT213 Chain Configuration Accessories (Replacement Chain - Dealer Installed) *Chains are 1.654" Double Standard (DS) Anti-Back Flex (ABF)*

6959317	3' x 4" Cup Teeth, Single Standard Pattern..... (Ship Weight 100 lbs.)	\$853.00
6959335	3' x 6" Cup Teeth, Single Standard Pattern..... (Ship Weight 113 lbs.)	\$901.00
6959321	3' x 4" Cup Teeth, Double Standard Pattern..... (Ship Weight 115 lbs.)	\$954.00
6959319	3' x 4" Cup & Carbide Teeth, Double Standard Pattern..... (Ship Weight 115 lbs.)	\$1,853.00
7209864	3' x 4" Shark/Cup Teeth, Double Standard Pattern.....	\$1,249.00
7209865	3' x 6" Shark/Cup Teeth, Double Standard Pattern.....	\$1,458.00

Part Number		Dealer Installed Accessories - Order From Parts	
Description			

For current Dealer Installed Accessories pricing, reference BobQuote or Dealer Parts Department.

6705531	Carbide Tooth Kit (Ship Weight 16 lbs.)	Parts	\$____
6701918	Cup Tooth Kit (Ship Weight 13 lbs.)	Parts	\$____
6959303	Double Standard Chain (No teeth attached) (Ship Weight 64 lbs.)	Parts	\$____
7110909	Spacer Kit, 6" (Used with cup teeth for 6" width)	Parts	\$____
7110910	Spacer Kit, 8" (Used with cup teeth for 8" width)	Parts	\$____
6806974	Trench Cleaner Adapter, 6" (Used with Trench Cleaner Kit) (Ship Weight 3 lbs.)	Parts	\$____
6806975	Trench Cleaner Adapter, 8" (Used with Trench Cleaner Kit) (Ship Weight 4 lbs.)	Parts	\$____


Destination Charge/Fuel Surcharge	
Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.	

Attachment	Assembly Required	Installation Time (Hours)
------------	-------------------	---------------------------

Trencher..... None..... -

Utility Forks

Bobcat Work Machine Attachment

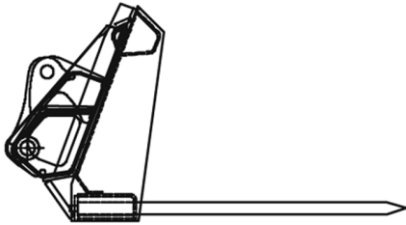

Quick Specs

	<u>60"</u>	<u>66"</u>	<u>72"</u>
Operating Weight.....	304 lbs	330 lbs	356 lbs
Number of teeth shipped.....	8	9	10
max number of teeth.....	15	17	19

Part Number	Description	Attachment	SLP in US \$
(5600, 5610) (UW56, UW53)			
6725178	60" Utility fork, with 8 Teeth..... (Use with Farm/Utility grapple P/N 7176977)		\$1,703.00
6725179	66" Utility fork, with 9 Teeth..... (Use with Farm/Utility grapple P/N 7176977)		\$1,994.00
6725180	72" Utility fork, with 10 Teeth..... (Use with Farm/Utility grapple P/N 7176977)		\$2,099.00


Destination Charge/Fuel Surcharge

Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
Utility Forks.....	None.....	-

Utility Frame

Bobcat Work Machine Attachment

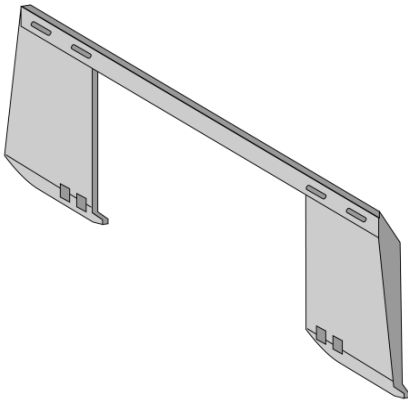

Quick Specs

Ship Weight..... 46 lbs

Overall Width..... 45.2"

Overall Height..... 19.0"

Part Number	Description	Attachment	SLP in US \$
(5600, 5610) (UW56, UW53) 6731114	Bob –Tach Utility Frame..... (To convert Attachments to Bob-Tach Mount, weld to flat surface)		Parts \$____

Destination Charge/Fuel Surcharge

Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.


Attachment	Assembly Required	Installation Time (Hours)
Utility Frame.....	None.....	-

****Bobcat is no longer selling sprayers. Dealers may purchase sprayers directly from Demco at:**

Jerry Sandbulte
Ag Product Coordinator - Maurer
L&G & Fertilizer Product Coordinator - Demco
800-543-3626 – Ext 125 Demco888-274-6010 – Ext 811 Maurer

Angle Blade

Bobcat Work Machine Attachment

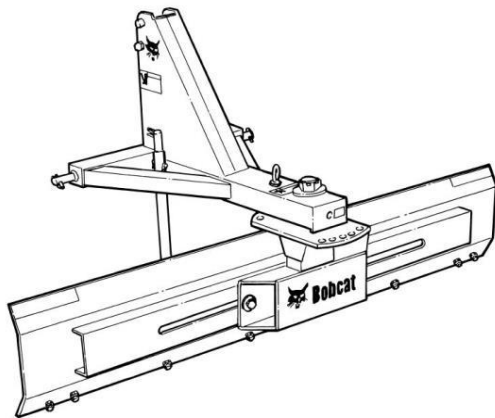

Quick Specs

	<u>AB72</u>	<u>AB84</u>
Moldboard (Working) Width.....	72"	84"
Moldboard Thickness.....	0.25"	0.25"
Moldboard (Blade) Height.....	15"	15"
Cutting Edge Height.....	6"	6"
Cutting Edge (thickness).....	.5" reversible	.5" reversible
Operating Weight.....	332 lbs.	348 lbs.
Overall Height.....	38"	38"
Overall Length.....	40"	40"
Storage Stand.....	Yes	Yes
Blade Positions Forward.....	5	5
Blade Positions Rearward.....	5	5
3pt. Hitch Size.....	Category 1	Category 1


Part Number	Description	Implement	SLP in US \$
(5610) (UW53)			
7365493	3 Pt. Angle Blade 72", 3AB72		\$1,067.00
7366558	3 Pt. Angle Blade 84", 3AB84.....		\$1,137.00

Destination Charge/Fuel Surcharge

Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Implement	Assembly Required	Installation Time (Hours)
Angle Blade.....	Install 3 pt. frame.....	0.50

Auger Bobcat Work Machine Attachment

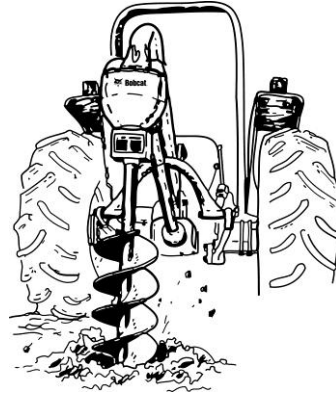

Quick Specs

	<u>Auger 3PT</u>
Drive Type.....	Gearbox
Tractor PTO Speed.....	540 RPM
Three-Point Hitch.....	Category 1
Auger Shaft Diameter.....	2"
Tractor PTO Horsepower (max).....	60
Drive Line Protection.....	Shear Bolt

Auger Bit Diameter	6 in.	9 in.	12 in.
Cutting Diameter ¹	7.5 in.	10.5 in.	13.5 in.

¹Standard cutting diameter, auger teeth are positioned at a 40° angle for general purpose cutting

Part Number	Description	Implement	SLP in US \$
-------------	-------------	-----------	--------------

(5610) (UW53)

7365497	3 Pt. Auger, 3PT.....		\$1,217.00
	(Includes drive units, drive shaft, and frame) (Auger bits must be ordered from parts)		

Part Number	Description	Dealer Installed Accessories - Order From Parts	
-------------	-------------	---	--

For current Dealer Installed Accessories pricing, reference BobQuote or Dealer Parts Department.

7399747	6" Bit (36" bit length).....	Parts	\$____
	-Ship Weight 24 lbs. (*compatible with CT10XX)		
7399749	9" Bit (36" bit length).....	Parts	\$____
	-Ship Weight 32 lbs. (*compatible with CT10XX)		
7399751	12" Bit (36" bit length).....	Parts	\$____
	-Ship Weight 42 lbs (*compatible with CT10XX)		
7390787	6" Bit (49" bit length).....	Parts	\$____
	-Ship Weight 42 lbs. (*not compatible with CT10XX)		
7390788	9" Bit (49" bit length).....	Parts	\$____
	-Ship Weight 57 lbs. (*not compatible with CT10XX)		
7390789	12" Bit (49" bit length).....	Parts	\$____
	-Ship Weight 64 lbs. (*not compatible with CT10XX)		


Destination Charge/Fuel Surcharge

Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Implement	Assembly Required	Installation Time (Hours)
Auger.....	Install drive shaft and gear box on frame.....	0.50

Box Blade

Bobcat Work Machine Attachment

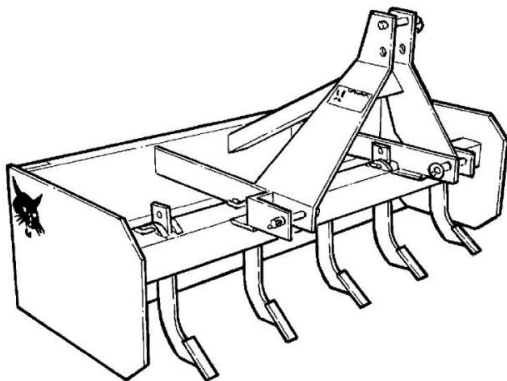

Quick Specs

	<u>BB60</u>	<u>BB72</u>
Working Width.....	61.5"	73.5"
Total Height.....	33"	33"
Cutting Edge Height.....	6"	6"
Cutting Edge Thickness.....	3/8"	3/8"
Number of Cutting Edges.....	Two (reversible)	Two (reversible)
Number of Digging Shanks.....	5	6
Scarifying Shank Penetration (Max).....	1-4"	1-4"
Shank Depth Adjustment.....	Manual	Manual
Operating Weight.....	395 lbs	445 lbs
3pt. Hitch Size.....	Category 1	Category 2

Part Number	Description	Implement	SLP in US \$
(5610) (UW53)			
7365525	3 Pt. Box Blade 60", 3BB60.....		\$1,210.00
7365527	3 Pt. Box Blade 72", 3BB72		\$1,498.00

Destination Charge/Fuel Surcharge

Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Implement	Assembly Required	Installation Time (Hours)
Box Blade.....	Install 3-Point frame to box.....	0.50

Broadcast Spreader
Bobcat Work Machine Attachment



Quick Specs

	<u>M1227(UW53)</u>	<u>M1225(UW56)</u>
Hopper Capacity.....	3 cubic ft	3 cubic ft
Length.....	22"	22"
Spreading Pattern Min.....	n/a	n/a
Spreading Pattern Max.....	25 ft	25 ft
Speed Control.....	Variable Speed Control Dial	Variable Speed Control Dial
Motor.....	12 V Dual Electric	12 V Dual Electric
Spinner Wheel.....	10" Diameter	10" Diameter
Operating Weight.....	240 lbs.	240 lbs.
Width.....	30"	30"
Height.....	32"	32"

Part Number	Description	Implement	SLP in US \$
(UW53, UW56)			
46916137	Throated Broadcast Spreader.....		\$1,677.00
	Model Number (M1227) when used with UW53 and model number (M1225) when used with UW56		
(UW53, UW56)			
46916139	Electric Gate Broadcast Spreader.....		\$2,411.00
	Model Number (M1227) when used with UW53 and model number (M1225) when used with UW56		

Part Number	Description	Dealer Installed Accessories - Order From Parts
<i>For current Dealer Installed Accessories pricing, reference BobQuote or Dealer Parts Department.</i>		
46920616	Broadcast Spreader Vehicle Integration Kit - UW53 & UW56.....	\$609.00
	(Required to operate spreaders 46916137 & 46916139)	
46920614	CT10 Broadcast Spreader Integration Kit.....	\$609.00
46958082	CT20 Broadcast Spreader Integration Kit.....	\$609.00
46958084	CT40 Broadcast Spreader Integration Kit.....	\$609.00
46920615	CT55 Broadcast Spreader Integration Kit.....	\$609.00

Destination Charge/Fuel Surcharge	
Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.	

Implement	Assembly Required	Installation Time (Hours)
-----------	-------------------	---------------------------

Drop Spreader Bobcat Work Machine Attachment



Quick Specs

	<u>DS25</u>	<u>DS60</u>
Length.....	17"	20"
Operating Weight.....	350 lbs.	650 lbs.
Width.....	42"	42"
Height.....	17.25"	28"
Hopper Capacity.....	2.5 cubic ft.	6 cubic ft.
Spreader Pattern Max.....	36"	36"
Speed Control.....	Variable Speed Control Dial	Variable Speed Control Dial
Motor.....	12 V Direct Drive	12 V Direct Drive

Part Number	Description	Implement	SLP in US \$
-------------	-------------	-----------	--------------

(UW53, UW56)

46916144	2.5 Cu Ft. Drop Spreader.....	\$4,507.00
----------	-------------------------------	------------

(UW53, UW56)

46916147	6.0 Cu Ft. Drop Spreader.....	\$4,926.00
----------	-------------------------------	------------

Part Number	Description	Dealer Installed Accessories - Order From Parts
-------------	-------------	---

For current Dealer Installed Accessories pricing, reference BobQuote or Dealer Parts Department.


46929637	CT10 Drop Spreader Integration Kit.....	\$609.00
46958105	CT20 Drop Spreader Integration Kit.....	\$609.00
46958114	CT40 Drop Spreader Integration Kit.....	\$609.00
46958113	CT55 Drop Spreader Integration Kit.....	\$609.00

Destination Charge/Fuel Surcharge

Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Implement	Assembly Required	Installation Time (Hours)
-----------	-------------------	---------------------------

Finish Mower Bobcat Work Machine Attachment

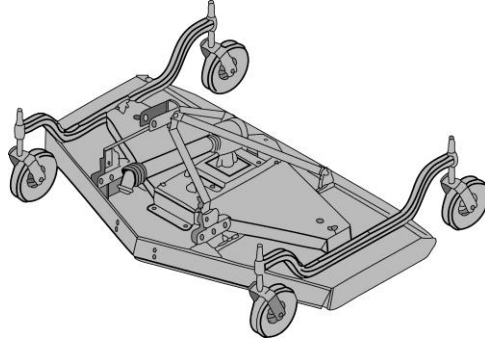

Quick Specs

	<u><i>FM60</i></u>	<u><i>FM72</i></u>
Cutting Width.....	60"	72"
Overall Width.....	62"	74"
Overall Length.....	43"	43"
Cutting Height Range.....	1-4.5"	1-4.5"
Number of Blades.....	3	3
Discharge.....	Rear	Rear
Tractor Requirements (PTO).....	23-32 hp	32-45 hp
Gear Box.....	Closed (540 RPM)	Closed (540 RPM)
3pt. Hitch Size.....	Cat 1	Cat 1
Weight.....	440 lbs	500 lbs

Part Number	Description	Implement	SLP in US \$
(5610) (UW53)			
7366574	3 Pt. Mower 60", FM60.....		\$3,369.00
	-Used with three-point hitch and rear PTO		
7366578	3 Pt. Mower 72", FM72.....		\$4,119.00
	-Used with three-point hitch and rear PTO		

Destination Charge/Fuel Surcharge

Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Implement	Assembly Required	Installation Time (Hours)
Mower.....	Install drive shaft guard, drive shaft mount & support bars.....	0.50

Quick Hitch

Bobcat Work Machine Attachment



Quick Specs

Overall Width.....

30.25"

Overall Height.....

23"

Overall Depth.....

8.25"

Empty Weight.....

73 lbs

Maximum PTO HP.....

50

Three-Point Hitch.....

Category 1

Part Number	Description	Implement	SLP in US \$
-------------	-------------	-----------	--------------

(5610) (UW53)

7500264

Quick Hitch.....

\$390.00

Destination Charge/Fuel Surcharge

Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.


Implement	Assembly Required	Installation Time (Hours)
-----------	-------------------	---------------------------

Quick Hitch.....

None.....

-

Rear Ballast Bobcat Work Machine Attachment
--



Quick Specs

Overall Width.....	35.5"
Overall Height.....	29"
Empty Weight.....	230 lbs.
Maximum Weight – Full.....	880 lbs.
Three-Point Hitch.....	Category 1

Part Number	Description	Implement	SLP in US \$
-------------	-------------	-----------	--------------

(5610) (UW53) 7366584	Rear Ballast Box.....		\$701.00
--------------------------	-----------------------	--	----------

Destination Charge/Fuel Surcharge
Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Implement	Assembly Required	Installation Time (Hours)
-----------	-------------------	---------------------------

Rear Ballast.....	None.....	-
-------------------	-----------	---

Rotary Cutter Bobcat Work Machine Attachment

Quick Specs

	<u>RC60</u>	<u>RC72</u>
Cutting Width.....	60"	72"
Overall Width.....	63"	75"
Overall Length.....	86"	93"
Cutting Height.....	1.5" - 9"	1.5" - 9"
Deck Type.....	Single	Single
Deck Thickness.....	12 ga.	12 ga.
Number of Blades.....	2	2
Blade Tip Speed.....	12,478 FPM	14,974 FPM
Discharge.....	Rear	Rear
Weight.....	530 lbs.	623 lbs.
Tractor PTO Requirements.....	20-50 hp	25-65 hp
	540 RPM	540 RPM
3pt. Hitch Size.....	Category 1	Category 1
Drive Line Protection.....	Shear bolt	Shear bolt

Part Number	Description	Implement	SLP in US \$
(5610) (UW53)			
7365545	3 Pt. Rotary Cutter 60", (3RC60)		\$2,188.00
	*It is recommended to operate RC with front-end loader installed for stability.		
7365693	3 Pt. Rotary Cutter 72", (3RC72)		\$2,602.00
	*It is recommended to operate RC with front-end loader installed for stability.		

Part Number		Dealer Installed Accessories - Order From Parts	
Description			

For current Dealer Installed Accessories pricing, reference BobQuote or Dealer Parts Department.


7395064	Front Rubber guard Kit 48" -Estimated install time 0.5 hour	Parts	\$____
7395065	Rear Metal guard Kit 48" -Estimated install time 0.5 hour	Parts	\$____
7395066	Front Rubber & Rear Metal guard Kit 48" -Estimated install time 1 hour	Parts	\$____
7395067	Front Rubber guard Kit 60" -Estimated install time 0.5 hour	Parts	\$____
7395068	Rear Metal guard Kit 60" -Estimated install time 0.5 hour	Parts	\$____
7395069	Front Rubber & Rear Metal guard Kit 60" -Estimated install time 1 hour	Parts	\$____
7395070	Front Rubber guard Kit 72" -Estimated install time 0.5 hour	Parts	\$____
7395071	Rear Metal guard Kit 72" -Estimated install time 0.5 hour	Parts	\$____
7395072	Front Rubber & Rear Metal guard Kit 72" -Estimated install time 1 hour	Parts	\$____

Destination Charge/Fuel Surcharge	
Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.	

Implement		Assembly Required	Installation Time (Hours)
Rotary Cutter.....		Install 3 pt. frame, PTO driveline and fill gear box with oil.....	1.00

Tiller

Bobcat Work Machine Attachment

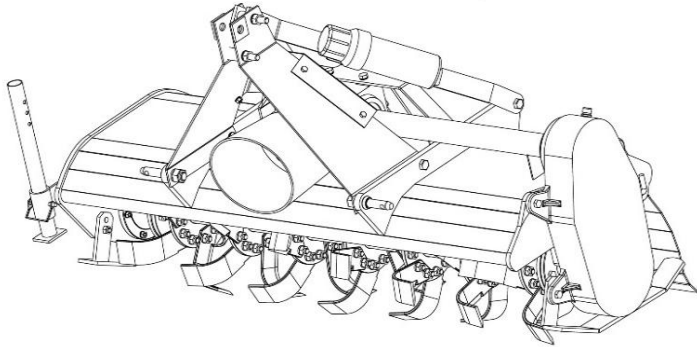

Quick Specs

	<u>Tiller 3PT 60</u>
Tilling Width.....	60"
Overall Width.....	64"
Working Depth.....	1"- 7" Adjustable
Operating Weight.....	638 lbs.
Drive Type.....	Gear Driven Oil-Bath
Blades Per Flange.....	6
Total Blades.....	42
Tractor PTO Requirements.....	25-50 540 RPM
Three-Point Hitch.....	Category 1
Drive Line Protection.....	Slip-Clutch
Storage Stand.....	Yes
Skid Shoes.....	Adjustable/Replaceable

Part Number	Description	Implement	SLP in US \$
-------------	-------------	-----------	--------------

(5610) (UW53)			
7365793	3 Pt. Tiller 60"		\$3,077.00


Destination Charge/Fuel Surcharge
Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Implement	Assembly Required	Installation Time (Hours)
-----------	-------------------	---------------------------

3Pt. Tiller.....	Install 3 pt. frame and fill gearbox with oil.....	1.00
------------------	--	------

Tine Rake

Bobcat Work Machine Attachment

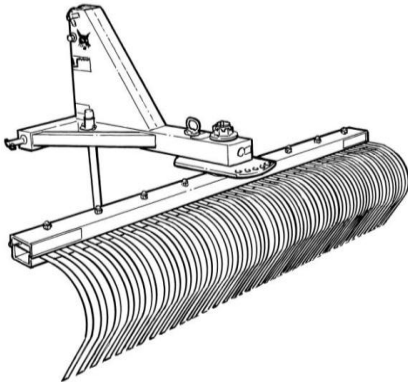

Quick Specs

	<u>3TR72</u>	<u>3TR84</u>
Working/Overall Width.....	72"	84"
Overall Length.....	42"	42"
Overall Height.....	39"	39"
Operating Weight.....	272 lbs.	287 lbs.
Rake Positions Forward.....	5	5
Rake Positions Rearward.....	5	5
3pt. Hitch Size.....	Category 1	Category 1

Part Number	Description	Implement	SLP in US \$
(5610) (UW53)			
7365541	3 Pt. Tine Rake 72", 3TR72.....		\$1,099.00
7366562	3 Pt. Tine Rake 84", 3TR84.....		\$1,177.00

Part Number	Description	Dealer Installed Accessories - Order From Parts	
-------------	-------------	---	--

For current Dealer Installed Accessories pricing, reference BobQuote or Dealer Parts Department.

7395073	Wheel Kit.....	Parts	\$_____
	-Estimated install time .25 hours.		

Destination Charge/Fuel Surcharge	
Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.	

Implement	Assembly Required	Installation Time (Hours)
Tine Rake.....	None.....	1.00