

BOBCAT COMPANY PRICE PAGES

NA Compact Wheel Loader - Attachments



Please note the following when using Bobcat Price Pages:


- All prices are shown in U.S. dollars.
- Check BobcatNET Pricing Homepage for current Canadian exchange rate.
- All Parts Pricing valid only for North America.
- Prices and specifications are subject to change without notice.

THE FOLLOWING UPDATES HAVE BEEN MADE TO THIS DOCUMENT:

Date	Description of Change
7/20/2021	Initial document formed.
10/18/2021	Updated pricing effective November 1st, 2021
7/1/2022	Updated pricing effective July 1st, 2022
12/15/2022	Added 14PH, 20PH and 25PH Auger Drive, Frames and Bits to be ordered through whole goods
1/1/2023	Updated pricing effective January 1st, 2023
11/6/2023	Added L95 model
12/11/2023	Added L95 buckets
12/19/2023	Updated snowblower motor packages
2/27/2024	Added 30PH Auger
3/22/2024	Transfer Auger bits from Wholegoods to Parts
6/24/2024	Updated pricing effective July 1st, 2024
11/6/2024	Added 96" HD Snow Blade
12/11/2024	Updated pricing effective January 1st, 2025
8/7/2025	Added PC Augers
10/30/2025	Added Bale Spears
1/1/2026	Updated pricing effective January 1st, 2026

Angle Broom

Bobcat Wheel Loader Attachment

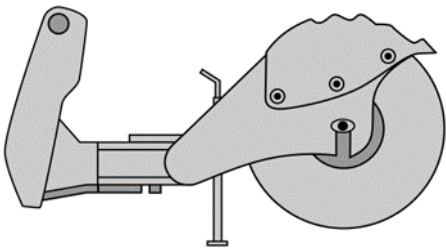

Quick Specs

	84"
Operating Weight.....	944 lbs.
Sweep Width Straight.....	84"
Sweep Width Fully Angled.....	77" @ 25°
Broom Angling.....	Hydraulic Cylinder
Drive System.....	Hydraulic Motor - Direct Drive
Flow Range.....	15-28 GPM
Broom Bristle Diameter.....	32"
Bristle Material.....	Poly Orange HD
Number of Bristle Sections.....	44 Zig-Zag 2 Straight
Electrical.....	7-Pin ACD, Standard

Part Number	Description	Attachment	SLP in US \$
(L65, L85, L95) 7337715	84" Angle Broom..... (CWL must be equipped with an Attachment Control Kit)		\$9,332.00

Part Number	Description	Dealer Installed Accessories - Order From Parts
7422930	CWL ACD Kit..... (7-Pin connector to control attachments with two or more functions)	\$____


Destination Charge/Fuel Surcharge

Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
Angle Broom.....	None.....	-

Auger- Planetary Drive

Bobcat Wheel Loader Attachment



Auger Drive Unit

Planetary Drive Auger Quick Specs

	Model 14PH/PC	Model 20PH/PC	Model 25PH/PC	Model 30PH
Ship Weight (Auger Drive).....	140 lbs.	140 lbs.	141 lbs.	216 lbs.
Ship Weight (Mtg. Frame).....	118 lbs	118 lbs	118 lbs	118 lbs
Operating Weight (less bit).....	258 lbs	258 lbs	258 lbs	334 lbs
Digging Depth (without extensions).....	56"	56"	56"	56"
Shaft Diameter - Round.....	2.5" (PC ONLY)	2.5" (PC ONLY)	2.5" (PC ONLY)	2.5"
Shaft Diameter - Hex.....	2.0"	2.0"	2.0"	2.0"
RPM				
@ 12 gpm (45 L/min.).....	48 rpm	-	-	-
@ 17 gpm (64 L/min.).....	71 rpm	49 rpm	-	-
@ 21 gpm (70 L/min.).....	90 rpm	61 rpm	49 rpm	42 rpm
@ 23 gpm (87 L/min.).....	98 rpm	67 rpm	53 rpm	46 rpm
@ 30 gpm (114 L/min.).....	-	-	-	-
@ 37 gpm (140 L/min.).....	-	-	-	-
Torque				
@ 2000 psi (19,788 kPa).....	911 ft.lb (1,235 Nm)	1,320 ft.lb (1,790 Nm)	1,622 ft.lb (2,199 Nm)	1,868 ft. lb (2,532 nm)
@ 2400 psi (16,547 kPa).....	1,208 ft.lb (1,638 Nm)	1,731 ft.lb (2,347 Nm)	2,104 ft.lb (2,853 Nm)	2,385 ft. lb (3,234 ft. lb)
@ 2700 psi (18,616 kPa).....	1,359 ft.lb (1,843 Nm)	1,947 ft.lb (2,640 Nm)	2,367 ft.lb (3,209 Nm)	2,638 ft. lb (3,638 Nm)
@ 3000 psi (20,684 kPa).....	1,465 ft.lb (1,986 Nm)	2,112 ft.lb (2,863 Nm)	2,581 ft.lb (3,499 Nm)	2,974 ft.lb (4,032 Nm)
@ 3300 psi (22,753 kPa).....	1,662 ft.lb (2,253 Nm)	2,380 ft.lb (3,227 Nm)	2,893 ft.lb (3,922 Nm)	(3,398 ft. lb) 4,607 Nm)
@ 3500 psi (24,132 kPa).....	1,762 ft.lb (2,389 Nm)	2,524 ft.lb (3,422 Nm)	3,069 ft.lb (4,161 Nm)	3,514 ft. lb (4,764 Nm)

Part Number	Description	Attachment	SLP in US \$
(L65, L85, L95) 7501034	Model 14PH Auger Drive Unit..... (Must also order Mounting Frame for Loader and Bit)(2" Hex shaft to connect to bit) (Auger Bit is shipped with bit retention pin)		\$2,327.00
46948006	Model 14PC Auger Drive Unit..... (Combination 2" hex / 2.5" round output shaft) (Must also order Mounting Frame forLoader and Bit)(Auger Bit is shipped with bit retention pin)		\$2,380.00
7501035	Model 20PH Auger Drive Unit..... (Must also order Mounting Frame for Loader and Bit)(2" Hex shaft to connect to bit) (Auger Bit is shipped with bit retention pin)		\$2,417.00
46948007	Model 20PC Auger Drive Unit..... (Combination 2" hex / 2.5" round output shaft) (Must also order Mounting Frame forLoader and Bit)(Auger Bit is shipped with bit retention pin)		\$2,470.00
7501036	Model 25PH Auger Drive Unit..... (Must also order Mounting Frame for Loader and Bit)(2" Hex shaft to connect to bit) (Auger Bit is shipped with bit retention pin)		\$2,554.00
46948008	Model 25PC Auger Drive Unit..... (Combination 2" hex / 2.5" round output shaft) (Must also order Mounting Frame forLoader and Bit)(Auger Bit is shipped with bit retention pin)		\$2,607.00
46890491	Model 30PH Auger Drive Unit..... (Must also order loader frame for Model 30PH and Bit)(Ships with 2" Hex and 2.5" Round output flange)(Auger Bit is shipped with bit retention pin)		\$3,928.00

Dealer Installed Auger Frames - Order From Sales			
Part Number	Description		SLP in US \$
(L65, L85, L95) 7508119	12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH Mounting Frame..... (Includes Mounting Hardware to attach auger drive)		\$755.00

Part Number	Description	SLP in US \$
-------------	-------------	--------------

Auger Drive & Bit Recommendations

12PH/PC, 14PH/PC Augers—Recommended bit size 6" – 18"
20PH/PC, 25PH/PC—Recommended bit size 6" – 30"
30PH - Recommended bit size 6"-36"
Auger bit combinations should be used as a guideline. Recommendations are based upon average digging conditions. Some combinations may contact machine frame.

Light Duty Auger Bits

Approved for 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC and 30PH Augers
Black color, Semi-Flight unless noted.
48" Length. Shaft Diameter- 2" Hex
Not compatible with 35PH or 50PH augers
Retaining Pin ships with auger

		Parts
7500735	6" Semi-Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$____
7500736	9" Semi-Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$____
7500737	12" Semi-Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$____
7500738	15" Semi-Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$____
7500739	18" Semi-Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$____
7500740	24" Semi-Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$____
7500746	30" Double Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$____
7500747	36" Double Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$____

Standard Duty Auger Bits
Approved for 12PH, 14PH, 20PH, 25PH and 30PH augers
Black color, Single Flight unless noted.
48" Length. Shaft Diameter- 2" Hex
Not compatible with 35PH or 50PH augers
Retaining Pin ships with auger

		Parts
7500763	6" Single Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$____
7500765	9" Single Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$____
7500767	12" Single Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$____
7500768	15" Single Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$____
7500769	18" Single Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$____
7500771	24" Single Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$____

Part Number	Description	Dealer Installed Auger Bits - Order From Parts
-------------	-------------	--

Heavy Duty Auger Bits Approved for 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC and 30PH Augers Black color, Single Flight unless noted. 48" Length. Shaft Diameter- 2" Hex Not compatible with 35PH or 50PH augers Retaining Pin ships with auger		
7500798	6" Single Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	Parts \$_____
7500800	9" Single Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$_____
7500802	12" Single Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$_____
7500803	15" Single Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$_____
7500805	20" Single Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$_____
7500806	24" Single Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$_____
7500807	30" Single Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$_____
7500808	36" Single Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$_____
7500812	9" Double Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$_____
7500814	12" Double Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$_____
7500816	18" Double Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$_____
7500818	24" Double Flight (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$_____

Tree Auger Bits Approved for 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC and 30PH Augers Black color, Double Flight 48" Length. Shaft Diameter- 2" Hex Not compatible with 35PH or 50PH augers Retaining Pin ships with auger		
7500822	18" Tree Auger Bit (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	Parts \$_____
7500823	24" Tree Auger Bit (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$_____
7500841	30" Tree Auger Bit (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$_____
7500842	36" Tree Auger Bit (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$_____

Rock Auger Bits Approved for 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC and 30PH Augers Black color, Double Flight, Carbide tips 48" Length. Shaft Diameter- 2" Hex Not compatible with 35PH or 50PH augers Retaining Pin ships with auger		
7500916	6" Carbide Rock Auger Bit (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	Parts \$_____
7500918	9" Carbide Rock Auger Bit (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$_____
7500922	18" Carbide Rock Auger Bit (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$_____
7500923	24" Carbide Rock Auger Bit (2" Hex)..... (For use with 12PH/PC, 14PH/PC, 20PH/PC, 25PH/PC, 30PH augers or 15H/30H augers)	\$_____

Auger- Direct Drive

Bobcat Wheel Loader Attachment



Auger Drive Unit

Direct Drive Auger Quick Specs

	Model 15C	Model 15H	Model 30C	Model 30H
Ship Weight (Auger Drive).....	245 lbs.	241 lbs.	263 lbs.	257 lbs.
Ship Weight (Mtg. Frame).....	193lbs	193 lbs	193 lbs	193 lbs
Operating Weight (less bit).....	358 lbs	354 lbs	376 lbs	370 lbs
Digging Depth (without extensions).....	62"	62"	62"	62"
Shaft Diameter - Round.....	2.5"	-	2.5"	-
Shaft Diameter - Hex.....	2.0"	2.0"	2.0"	2.0"
RPM				
@ 12 gpm (45 L/min.).....	57 rpm	57 rpm	-	-
@ 17 gpm (64 L/min.).....	80 rpm	80 rpm	41 rpm	41 rpm
@ 21 gpm (70 L/min.).....	99 rpm	99 rpm	51 rpm	51 rpm
@ 23 gpm (87 L/min.).....	109 rpm	109 rpm	56 rpm	56 rpm
@ 30 gpm (114 L/min.).....	-	-	70 rpm	70 rpm
@ 37 gpm (140 L/min.).....	-	-	90 rpm	90 rpm
Torque				
@ 2000 psi (19,788 kPa).....	1,300 ft.lb. (1,763 Nm)	1,300 ft.lb. (1,763 Nm)	2,520 ft.lb. (3,417 Nm)	2,520 ft.lb. (3,417 Nm)
@ 2400 psi (16,547 kPa).....	1,560 ft.lb. (2,115 Nm)	1,560 ft.lb. (2,115 Nm)	3,024 ft.lb. (4,100 Nm)	3,024 ft.lb. (4,100 Nm)
@ 2700 psi (18,616 kPa).....	1,775 ft.lb. (2,379 Nm)	1,775 ft.lb. (2,379 Nm)	3,402 ft.lb. (4,213 Nm)	3,402 ft.lb. (4,213 Nm)
@ 3000 psi (20,684 kPa).....	1,950 ft.lb. (2,644 Nm)	1,950 ft.lb. (2,644 Nm)	3,780 ft.lb. (5,125 Nm)	3,780 ft.lb. (5,125 Nm)
@ 3300 psi (22,753 kPa).....	2,415 ft.lb. (2,908 Nm)	2,415 ft.lb. (2,908 Nm)	4,158 ft.lb. (5,638 Nm)	4,158 ft.lb. (5,638 Nm)
@ 3500 psi (24,132 kPa).....	2,275 ft.lb. (3,084 Nm)	2,275 ft.lb. (3,084 Nm)	4,410 ft.lb. (5,979 Nm)	4,410 ft.lb. (5,979 Nm)

Part Number	Description	Attachment	SLP in US \$
(L65, L85, L95) 6809442	Model 15C Auger Drive Unit (Must also order Mounting Frame and Bit) (Auger drive unit is shipped with a 7/8" round bit retention pin, if used in conjunction with a hex bit a 5/8" Pin Kit P/N 6809733 is required.)		Discontinued
7145345	Model 15H Hex Shaft Auger Drive Unit (Must also order Mounting Frame and Bit)		Discontinued
6809445	Model 30C Auger Drive Unit (Must also order Mounting Frame and Bit) (Auger drive unit is shipped with a 7/8" round bit retention pin, if used in conjunction with a hex bit a 5/8" Pin Kit P/N 6809733 is required.)		Discontinued
7138264	Model 30H Hex Shaft Auger Drive Unit (Must also order Mounting Frame and Bit)		Discontinued

Part Number	Description	Dealer Installed Auger Frames - Order From Sales	SLP in US \$
(L65, L85, L95) 6812980	Auger 15 C/H, 30 C/H Mounting Frame (Includes mounting hardware) (Includes bumper kit p/n 7172609)		Discontinued

Part Number		Dealer Installed Accessories - Order From Parts
Description		

For current Dealer Installed Accessories pricing, reference BobQuote or Dealer Parts Department.

Auger Drive & Bit Recommendations

Model 15C, 30C & PC Augers—Recommended bit size 6" – 36"
Model 15H and 30H Augers—Recommended bit size 6" – 36"
Auger bit combinations should be used as a guideline. Recommendations are based upon average digging conditions.

Standard Auger Bits & Accessories

Charcoal Color, Round Drive, 49" Length, Double Flight, Variable Tooth Angle: 40 ° or 50 °

6666891	6" Bit..... (Ship Weight 60 lbs.)	Parts	\$____
6666892	9" Bit..... (Ship Weight 91 lbs.)	Parts	\$____
6666893	12" Bit..... (Ship Weight 128 lbs.)	Parts	\$____
6666894	15" Bit..... (Ship Weight 119 lbs.)	Parts	\$____
6666895	18" Bit..... (Ship Weight 160 lbs.)	Parts	\$____
6666896	24" Bit..... (Ship Weight 203 lbs.)	Parts	\$____
6666897	30" Bit..... (Ship Weight 275 lbs.)	Parts	\$____
6666898	36" Bit (Model 15 & 30)..... (Ship Weight 380 lbs.)	Parts	\$____
6666900	24" Tree Planting Bit..... (Ship Weight 162 lbs.)	Parts	\$____
6666901	30" Tree Planting Bit..... (Ship Weight 236 lbs.)	Parts	\$____
6666902	36" Tree Planting Bit..... (Ship Weight 305 lbs.)	Parts	\$____

Standard Auger Bit Accessories

6679806	48" Adjustable Round Extension..... (For Model 15, 15C, 30 and 30C or PC Augers) (6" and 9" bits will not allow the extension to telescope, only works in the top position) (Ship Weight 82 lbs.)	Parts	\$____
6679826	24" Adjustable Round Extension..... (For Model 15, 15C, 30 and 30C or PC Augers) (6" and 9" bits will not allow the extension to telescope, only works in the top position) (Ship Weight 44 lbs.)	Parts	\$____
6679825	14" Round Extension..... (For Model 15, 15C, 30 and 30C or PC Augers) (Ship Weight 24 lbs.)	Parts	\$____

Heavy Duty Auger Bits

6674957	6" Bit..... (If installed on a 15C or 30C or PC Auger drive unit, a 5/8" Pin Kit P/N 6809733 is required) (Ship Weight 46 lbs.)	Parts	\$____
6674958	9" Bit..... (If installed on a 15C or 30C or PC Auger drive unit, a 5/8" Pin Kit P/N 6809733 is required) (Ship Weight 59 lbs.)	Parts	\$____
6674959	12" Bit..... (If installed on a 15C or 30C or PC Auger drive unit, a 5/8" Pin Kit P/N 6809733 is required) (Ship Weight 76 lbs.)	Parts	\$____
6674960	16" Bit..... (If installed on a 15C or 30C or PC Auger drive unit, a 5/8" Pin Kit P/N 6809733 is required) (Ship Weight 97 lbs.)	Parts	\$____
6675034	18" Bit..... (If installed on a 15C or 30C or PC Auger drive unit, a 5/8" Pin Kit P/N 6809733 is required) (Ship Weight 112 lbs.)	Parts	\$____
6674961	20" Bit..... (If installed on a 15C or 30C or PC Auger drive unit, a 5/8" Pin Kit P/N 6809733 is required) (Ship Weight 117 lbs.)	Parts	\$____
6674962	24" Bit..... (If installed on a 15C or 30C or PC Auger drive unit, a 5/8" Pin Kit P/N 6809733 is required) (Ship Weight 151 lbs.)	Parts	\$____
6674963	30" Bit..... (If installed on a 15C or 30C or PC Auger drive unit, a 5/8" Pin Kit P/N 6809733 is required) (Ship Weight 193 lbs.)	Parts	\$____
6674964	36" Bit..... (If installed on a 15C or 30C or PC Auger drive unit, a 5/8" Pin Kit P/N 6809733 is required) (Ship Weight 270 lbs.)	Parts	\$____
6674965	42" Bit..... (If installed on a 15C or 30C or PC Auger drive unit, a 5/8" Pin Kit P/N 6809733 is required) (Ship Weight 302 lbs.)	Parts	\$____

Rock Auger Bits

White color, Hex shaft, 42" Length, Single Flight

7169665	6" Bit..... (Ship Weight 64 lbs.)	Parts	\$____
7169666	9" Bit..... (Ship Weight 78 lbs.)	Parts	\$____
7169667	12" Bit..... (Ship Weight 102 lbs.)	Parts	\$____
7169668	16" Bit..... (Ship Weight 123 lbs.)	Parts	\$____
7169669	18" Bit..... (Ship Weight 149 lbs.)	Parts	\$____
7169670	20" Bit..... (Ship Weight 152 lbs.)	Parts	\$____
7169671	24" Bit..... (Ship Weight 195 lbs.)	Parts	\$____
7169672	30" Bit..... (Ship Weight 225 lbs.)	Parts	\$____

Heavy Duty Auger Bits Accessories/Rock Auger Bits Accessories

6809733	5/8" (.625) Pin Kit..... (Used for retention of hex bits on 15C, 30C, and PC Auger drive units) (Ship Weight 11 lbs.)	Parts	\$ ____
6679807	48" Adjustable Hex Extension..... (For Model 15H, 15C, 30H and 30C Augers) (Ship Weight 48 lbs.)	Parts	\$ ____
6662876	24" Adjustable Hex Extension..... (For Model 15H, 15C, 30H and 30C Augers) (Ship Weight 33 lbs.)	Parts	\$ ____
6662874	Round Shaft To Hex Bit Adapter, Cast..... (For Model 15 & 30 Augers with Round Output Shaft) (Ship Weight 19 lbs.)	Parts	\$ ____
6662875	Hex Shaft To Round Bit Adapter, Cast..... (For Model 15H, 15C, 30H and 30C Augers with Hex Output Shaft) (Ship Weight 20 lbs.)	Parts	\$ ____
7137091	Hex Shaft To Round Bit Adapter, Sleeve..... (For Model 15H, 15C, 30H and 30C Augers with Hex Output Shaft) (5/8" Pin Kit P/N 6809733 is required.) (Sleeve slides over hex shaft, converting it to round) (Ship Weight 3 lbs.)	Parts	\$ ____

Destination Charge/Fuel Surcharge Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.
--

Attachment	Assembly Required	Installation Time (Hours)
Auger.....	Assemble drive unit to mounting frame and install bit.....	0.50

Bale Spears
Bobcat Wheel Loader Attachment



Quick Specs

	<u>RB42</u>	<u>MS26</u>	<u>LS42</u>
Main Tine Length.....	42"	26"	42"
Height.....	18.5"	18.5"	18.5"
Width.....	43"	60.5"	60.5"
Bale Capacity.....	3000 lbs.	3000 lbs.	4000 lbs.
Operating Weight.....	146 lbs.	165 lbs.	190 lbs.

Part Number	Description	Attachment	SLP in US \$
	(CT2025, CT2035, CT2040, CT2535, CT2540, CT4045, CT4050, CT4058, CT4545, CT4558, CT5545, CT5550, CT5558) (UT6066, UT6566, UT6573) (T64, T66, T76, T86, T450, T550, T595, T650, T740, T770) (S64, S66, S76, S86) (L65, L95) (UW56) (TL519, TL623) (L35)		
46963946	Bale Spear- Round Bale.....		\$938.00
	(CT2025, CT2035, CT2040, CT2535, CT2540, CT4045, CT4050, CT4058, CT4545, CT4558, CT5545, CT5550, CT5558) (UT6066, UT6566, UT6573) (T64, T66, T76, T86, T450, T550, T595, T650, T740, T770) (S64, S66, S76, S86) (L65, L95) (UW56) (TL519, TL623) (L35)		
46963945	Bale Spear- Medium Square Bale.....		\$1,185.00
	(CT5545, CT5550, CT5558) (UT6066, UT6566) (T64, T66, T76, T86, T450, T550, T595, T650, T740, T770) (S64, S66, S76, S86) (L65, L95) (UW56) (TL519, TL623) (L35)		
46963944	Bale Spear- Large Square Bale.....		\$1,218.00

Destination Charge/Fuel Surcharge Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.
--

Attachment	Assembly Required	Installation Time (Hours)
------------	-------------------	------------------------------

Combination Bucket

Bobcat Wheel Loader Attachment



Quick Specs

	74" (L65)	74" (L85, L95)
Operating Weight.....	432 lbs.	487 lbs.
Overall Width.....	74"	74"
Overall Length.....	28.2"	34.5"
Overall Height.....	34.6"	34.6"
Clamshel Max Height.....	19.2"	19.2"
ISO-Struck Capacity.....	.54 cu/yd (14.6 cu/ft)	.689 cu/yd (18.6 cu/ft)
ISO-Heaped Capacity.....	.737 cu/yd (19.9 cu/ft)	.907 cu/yd (24.5 cu/ft)
Number of Teeth.....	9	9

Part Number	Description	Attachment	SLP in US \$
(L65) 7393688	74" Combination Bucket - L65..... (Bolt-on Teeth are available from Bobcat Parts)		\$8,128.00
(L85, L95) 7393686	74" Combination Bucket - L85, L95..... (Bolt-on Teeth are available from Bobcat Parts)		\$10,348.00


Destination Charge/Fuel Surcharge

Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
Combination Bucket.....	None.....	-

General Purpose Bucket

Bobcat Wheel Loader Attachment

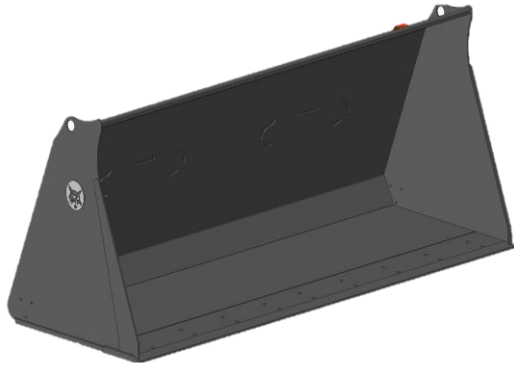

Quick Specs

	<u>74" (L65)</u>	<u>74" (L85, L95)</u>	<u>78" (L95)</u>
Operating Weight.....	556 lbs.	642 lbs.	734 lbs.
Overall Width.....	74.8"	74.8"	78.7"
Overall Length.....	30.6"	33.4"	35.8"
Overall Height.....	28.2"	31.3"	34.3"
ISO-Struck Capacity.....	.722 cu/yd (19.5 cu/ft)	.893 cu/yd (24.1 cu/ft)	1.04 cu/yd (28.2 cu/ft)
ISO-Heaped Capacity.....	.86 cu/yd (23.2 cu/ft)	1.05 cu/yd (28.5 cu/ft)	1.25cu/yd (33.8 cu/ft)
Number of teeth.....	9	9	9

Part Number	Description	Attachment	SLP in US \$
(L65) 7427816	74" General Purpose Bucket - L65.....		\$3,889.00
(L85, L95) 7427815	74" General Purpose Bucket - L85, L95.....		\$4,190.00
(L95) 7484957	78" General Purpose Bucket - L95.....		\$4,528.00

Dealer Installed Accessories - Order From Parts	
Part Number	Description
<i><u>For current Dealer Installed Accessories pricing, reference BobQuote or Dealer Parts Department.</u></i>	
7423019	74" Bolt-on Cutting Edge Kit..... Parts \$____
7484982	78" Bolt-on Cutting Edge Kit..... Parts \$____
7239328	Bolt-on Tooth..... Parts \$____ (Order quantity 9)

Destination Charge/Fuel Surcharge
Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
General Purpose Bucket.....	None.....	-

Light Material Bucket

Bobcat Wheel Loader Attachment



Quick Specs

	74" (L65)	74" (L85)	78" (L95)
Operating Weight.....	710 lbs.	765 lbs.	922 lbs.
Overall Width.....	74.8"	74.8"	78.7"
Overall Length.....	40.4"	44.5"	48.8"
Overall Height.....	34.2"	37"	39"
ISO-Struck Capacity.....	1.17 cu/yd (31.5 cu/ft)	1.38 cu/yd (37.2 cu/ft)	1.7 cu/yd (45.95 cu/ft)
ISO-Heaped Capacity.....	1.38 cu/yd (37.2 cu/ft)	1.63 cu/yd (44.1 cu/ft)	2.0 cu/yd (54.0 cu/ft)

Part Number	Description	Attachment	SLP in US \$
(L65) 7352444	74" Light Material Bucket - L65.....		\$3,623.00
(L85) 7352445	74" Light Material Bucket - L85.....		\$4,881.00
(L95) 7484959	78" Light Material Bucket - L95.....		\$5,345.00


Dealer Installed Accessories - Order From Parts			
Part Number	Description		
<i><u>For current Dealer Installed Accessories pricing, reference BobQuote or Dealer Parts Department.</u></i>			
7423019	74" Bolt-on Cutting Edge Kit.....	Parts	\$____
7484982	78" Bolt-on Cutting Edge Kit.....	Parts	\$____
7239328	Bolt-on Tooth..... (Order quantity 9)	Parts	\$____

Destination Charge/Fuel Surcharge

Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
Light Material Bucket.....	None.....	-

Rock Bucket Bobcat Wheel Loader Attachment

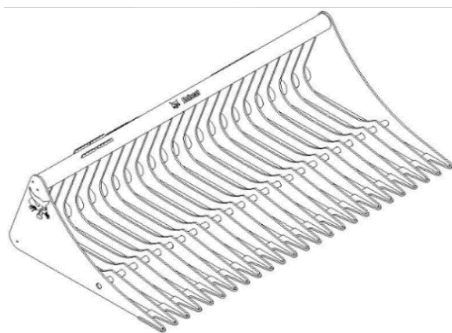

Quick Specs

	<u>74"</u>
Operating Weight.....	652 lbs
Overall Width.....	75.4"
Overall Height.....	20.8"
Overall Length (Bucket Lip or Bottom of Bucket).....	43.6"
Tine Spacing.....	3"
Number of Tines.....	21



Part Number	Description	Attachment	SLP in US \$
(L65, L85, L95)			
7185945	74" Rock Bucket.....		\$2,821.00

Destination Charge/Fuel Surcharge Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.
--

Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
Rock Bucket.....	None.....	-

Industrial Bucket Grapple
Bobcat Wheel Loader Attachment

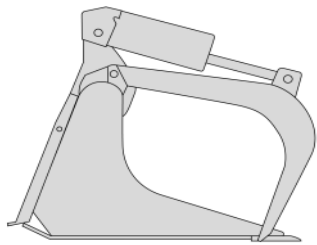

Industrial Bucket Grapple

Industrial Fork Grapple

Quick Specs


	<u>74" Bkt.</u>	<u>78" Fork</u>	<u>80" Bkt.</u>	<u>86" Bkt.</u>	<u>86" Fork</u>
Operating Weight.....	960 lbs	1218 lbs	1101 lbs	1302 lbs	1293 lbs
Overall Grapple Width.....	74"	80.1"	80"	86"	86.1"
# of Teeth - Factory.....	N/A	8	N/A	N/A	9
# of Teeth - Possible.....	N/A	15	N/A	N/A	17

Part Number	Description	Attachment	SLP in US \$
(L65, L85, L95)			
7488345	74" Industrial Bucket Grapple..... (Bolt-On Cutting Edge included)		\$5,530.00
7166624	78" Industrial Fork Grapple, with 8 teeth.....		\$7,119.00
7481680	80" Industrial Bucket Grapple..... (Bolt-On Cutting Edge included)		\$6,123.00
7480861	86" Industrial Fork Grapple.....		\$7,806.00
7481105	86" Industrial Bucket Grapple..... (Bolt-On Cutting Edge included)		\$6,500.00

Destination Charge/Fuel Surcharge
Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
Industrial Grapple.....	None.....	-

Grapple, Root
Bobcat Loader Attachment



Quick Specs


	<u>72"</u>	<u>80"</u>	<u>86"</u>
Operating Weight	1049 lbs	1164 lbs	1181 lbs
Height (closed).....	34.4"	34.4"	34.4"
Height (open).....	51.7"	51.7"	51.7"
Length.....	42.1"	42.1"	42.1"
Width.....	73.1"	80.4"	86.4"
Teeth.....	#N/A	#N/A	#N/A
Maximum Tooth Opening.....	36.8"	36.8"	36.8"

Part Number	Description	Attachment	SLP in US \$
(L65, L85, L95)			
7488431	72" Root Grapple.....		\$5,525.00
7483226	80" Root Grapple.....		\$6,118.00
7483227	86" Root Grapple.....		\$6,575.00

Destination Charge/Fuel Surcharge
Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
Root Grapple.....	None.....	-

Landplane
Bobcat Wheel Loader Attachment

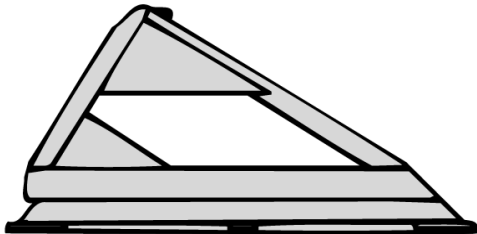

Quick Specs


	<u>72" Deluxe</u>
Operating Weight.....	680 lbs
Length.....	51.5"
Width.....	73"
Height.....	20.9"
Working Depth-Scarifier.....	3.5"
Cutting Edge.....	0.5" x 6"

Part Number	Description	Attachment	SLP in US \$
(L65, L85, L95)			
6906150	72" Deluxe Landplane..... (Includes expanded metal grate, scarifier assembly, teeth and respective hardware)		\$3,084.00

Destination Charge/Fuel Surcharge
Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
Landplane.....	None.....	-

Pallet Fork Bobcat Wheel Loader Attachment

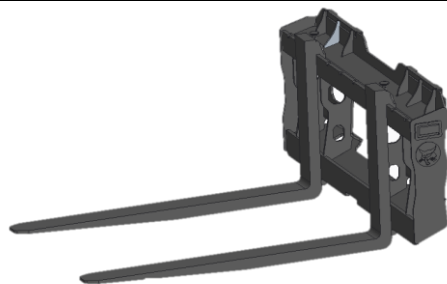

Quick Specs	
-------------	--

Frame Weight.....	230 lbs.
Frame Capacity.....	6400 lbs.
Frame Width.....	53.5"
Frame Height.....	26.6"
Teeth Weight.....	256 lbs.
Teeth Length.....	47.2"
Teeth Width.....	4"


Part Number	Description	Attachment	SLP in US \$
(L65, L85, L95)			
7353072	Pallet Fork Frame.....		\$1,370.00
7353061	Pallet Fork Tines, set of 2.....		\$1,312.00

Destination Charge/Fuel Surcharge Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.
--

Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
Pallet Forks.....	None.....	-

Snow Blade
Bobcat Wheel Loader Attachment

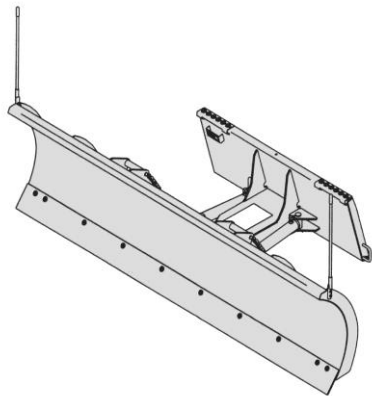

Quick Specs

	84"	96" <i>HD</i>
Operating Weight.....	620 lbs	867 lbs
Width.....	84"	96"
Height.....	28"	28.4"
Working Width (Fully Angled).....	73"	83"
Steel Cutting Edge.....	.375" x 6"	.5" x 6"
Cylinders.....	2	1
Trip Springs.....	4	4
Optional Rubber Cutting Edge.....	1" x 6"	1" x 6"

Part Number	Description	Attachment	SLP in US \$
-------------	-------------	------------	--------------

(L65, L85, L95)			
6716836	84" Snow Blade (with hydraulic angle).....		\$4,155.00
7207862	96" Snow Blade – Heavy Duty (with hydraulic angle).....		\$5,916.00

Part Number	Description	Dealer Installed Accessories - Order From Sales	SLP in US \$
-------------	-------------	---	--------------

6716834	End Wing Kit.....		\$694.00
	(Converts 84" Snow Blade in to Snow Pushers) (Ship Weight 95 lbs.)		

Part Number	Description	Dealer Installed Accessories - Order From Parts
-------------	-------------	---

For current Dealer Installed Accessories pricing, reference BobQuote or Dealer Parts Department.

6905400	Rubber Wear Edge Kit, 84"	Parts	\$ _____
6673634	Replacement Cutting Edge, 84"*	Parts	\$ _____
7169615	Rubber Wear Edge Kit, 96" HD.....	Parts	\$ _____
7161165	Replacement Cutting Edge, 96" HD*	Parts	\$ _____

* Additional hardware for replacement cutting edges is needed.
Certain applications may cause premature wear of the Rubber Wear Edge.


Destination Charge/Fuel Surcharge
Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
------------	-------------------	---------------------------

Snow Blade.....	Adjust shoes & install blade edge indicators.....	0.25
End Wing Kit.....	Install wings.....	0.25
Cutting Edge.....	Bolt on edge.....	0.50

Snow Pusher

Bobcat Wheel Loader Attachment

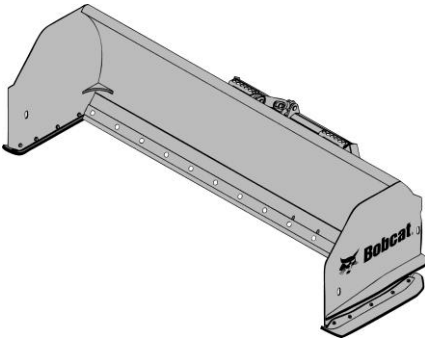

Quick Specs

	<u>94"</u>	<u>120"</u>
Operating Weight.....	1122 lbs	1256 lbs
Overall Width.....	102"	128"
Working Width.....	94.6"	121"
Length.....	56.2"	56.2"
Height.....	37.8"	37.8"
Cutting Edge.....	1.5" x 8" Rubber	1.5" x 8" Rubber
Skid Shoes.....	.75" x 5" AR400	.75" x 5" AR400
Color.....	Orange	Orange
Float		
Vertical.....	2.3"	2.3"
Tilt.....	12 degrees	12 degrees
Oscillation.....	+/- 4.5 degrees	+/- 4.5 degrees


Part Number	Description	Attachment	SLP in US \$
(L65, L85, L95)			
7113767	94" Snow Pusher.....		\$4,640.00
7116164	120" Snow Pusher.....		\$5,106.00

Destination Charge/Fuel Surcharge

Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
Snow Pusher.....	None.....	-

Snow Pusher Pro
Bobcat Wheel Loader Attachment

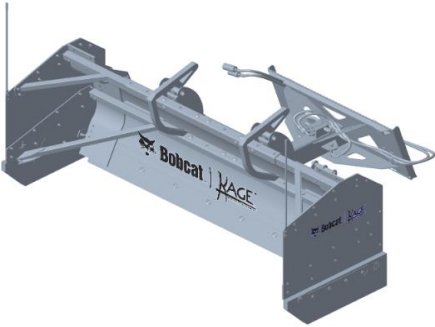

Quick Specs

	<u>96"</u>
Operating Weight.....	1473 lbs
Overall Width.....	104"
Working Width.....	96"
Length (includes interface).....	75.8"
Height.....	40"
Cutting Edge (High Carbon Steel).....	5/8" x 6"
Skid Shoes (Poly).....	.36" x 9.75" x 1.5"
Number of Trip Springs.....	4
Color.....	Orange
Float	
Tilt.....	35 degrees
Oscillation.....	+/- 6 degrees

Part Number	Description	Attachment	SLP in US \$
-------------	-------------	------------	--------------

(L65, L85, L95)			
7385513	96" Snow Pusher Pro.....		\$10,846.00

Part Number	Description	Dealer Installed Accessories - Order From Parts	
-------------	-------------	---	--

For current Dealer Installed Accessories pricing, reference BobQuote or Dealer Parts Department.


7396911	96" Steel Cutting Edge.....	Parts	\$ ____
7396917	Curb Guard Kit.....	Parts	\$ ____
7396918	Backdrag Kit.....	Parts	\$ ____
7396919	Poly Skid Kit.....	Parts	\$ ____

Destination Charge/Fuel Surcharge	
Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.	

Attachment	Assembly Required	Installation Time (Hours)
------------	-------------------	---------------------------

Snow Pusher Pro.....	None.....	-
----------------------	-----------	---

Snowblower
Bobcat Loader Attachment



Quick Specs

	<u>SB32 x 74"</u>	<u>SB32 x 80"</u>	<u>SB32 x 86"</u>
Chute Rotation.....	270°	270°	270°
Deflector Control.....	Hydraulic	Hydraulic	Hydraulic
Throw Distance.....	Up to 40'	Up to 40'	Up to 40'
Flow Range.....	13-31 GPM	13-31 GPM	13-31 GPM
Fan Diameter.....	19.5"	19.5"	19.5"
Auger Diameter.....	20"	20"	20"
Length.....	75.5"	81.5"	87"
Width.....	45"	45"	45"
Intake Height.....	33"	33"	33"
Max Pressure.....	3400 psi	3400 psi	3400 psi
Operating Weight.....	981 lbs	1016 lbs	1041 lbs

SB32 Hydraulic Motor Packages

Must order a Hydraulic Motor Package with the SB32 Snowblower Models

80cc Motor Package.....	13-18 gpm
100cc Motor Package.....	18-22 gpm
130cc Motor Package.....	22-28 gpm
160cc Motor Package.....	28-31 gpm

Part Number	Description	SB32 Snowblower	SLP in US \$
-------------	-------------	-----------------	--------------

Must order a hydraulic motor package with the SB32 Snowblowers

(L65, L85, L95)			
M7045	SB32 x 74" Snowblower.....		\$7,784.00
	(CWL must be equipped with an Attachment Control Kit and Roll Back Stop Kit)		
M7045-R01-C02	100cc Motor Package.....		\$1,099.00
M7045-R01-C03	130cc Motor Package.....		\$1,147.00
	(High Flow Only)		
M7048	SB32 x 80" Snowblower.....		\$8,006.00
	(CWL must be equipped with an Attachment Control Kit and Roll Back Stop Kit)		
M7048-R01-C02	100cc Motor Package.....		\$1,099.00
M7045-R01-C03	130cc Motor Package.....		\$1,147.00
	(High Flow Only)		
M7049	SB32 x 86" Snowblower.....		\$8,916.00
	(CWL must be equipped with an Attachment Control Kit and Roll Back Stop Kit)		
M7049-R01-C02	100cc Motor Package.....		\$1,099.00
M7049-R01-C03	130cc Motor Package.....		\$1,147.00

Part Number	Description	Dealer Installed Accessories - Order From Parts	
-------------	-------------	---	--

7422930	CWL ACD Kit.....	\$ ____
	(7-Pin connector to control attachments with two or more functions)	
7504326	CWL Roll Back Stop Kit.....	\$ ____
	(Limits roll back to prevent attachment damage)	

Destination Charge/Fuel Surcharge	
Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.	

Attachment	Assembly Required	Installation Time (Hours)
------------	-------------------	---------------------------


Snowblower..... None..... -

Snow V-Blade


Bobcat Loader Attachment



Blade in "V" Configuration

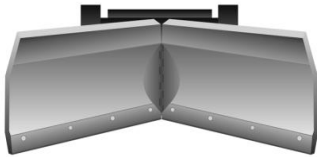

Blade in "Scoop" Configuration



Blade in "Angled" Configuration

Quick Specs

	<u>84"</u>	<u>96"</u>	<u>108"</u>
Operating Weight.....	779 lbs	824 lbs	868 lbs
Operating Weight with Oscillating kit....	1013 lbs	1058 lbs	1102 lbs
Width:			
V-Configuration.....	75"	85.5"	96"
Scoop-Configuration.....	74"	84"	95"
30° Angle-Configuration.....	75"	85"	95"
Straight-Configuration.....	86"	98"	110"
Height with Blade Extension.....	32.8"	32.8"	32.8"
Length.....	47.3"	47.3"	47.3"
Oscillation (with flotation kit).....	+/- 10	+/- 10	+/- 10

Part Number	Description	Attachment	SLP in US \$
(L65, L85, L95) 6958577	84" Snow V-Blade..... (CWL must be equipped with an Attachment Control Kit)		\$7,037.00

Dealer Installed Accessories - Order From Sales		
Part Number	Description	SLP in US \$
7102603	Blade Flotation Kit..... (Allows blade to oscillate +/- 10 degrees, includes pin to lock in place at 0 degrees) (Approved for use with 72", 84", 96" and 108" Snow V-Blades) (The frame flotation mounts between the existing frame and blade and will extend the overall blade length eight-inches from the Bob-Tach.) (Shipping weight 254 lbs.) (Estimated install time 1.5 hrs)	\$1,041.00


Dealer Installed Accessories - Order From Parts		
Part Number	Description	
<i>For current Dealer Installed Accessories pricing, reference BobQuote or Dealer Parts Department.</i>		
6958666	84" Rubber Cutting Edge Kit (Includes hardware)	Parts \$____
7422930	CWL ACD Kit..... (7-Pin connector to control attachments with two or more functions)	\$____

Destination Charge/Fuel Surcharge	
Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.	

Attachment	Assembly Required	Installation Time (Hours)
Snow V-Blade.....	None.....	-
Flotation Kit (dealer installed).....	Install oscillating kit.....	1.50

Tiller

Bobcat Wheel Loader Attachment

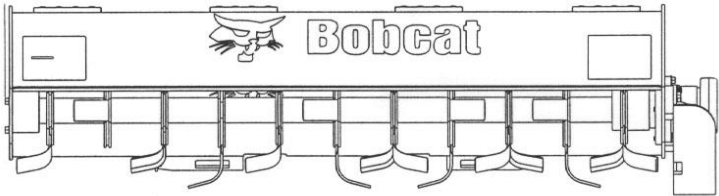

Quick Specs

76"

Operating Weight..... 749 lbs

Working Width..... 75.4"

Overall Width..... 86.8"

Tines..... 44

Working Depth..... 6" maximum

Tine Rotation..... Bi-rotational

Drive..... Direct Drive

Travel Direction..... Forward/Reverse

Flow Range..... 17-40 GPM

Skid Shoe..... Optional

Part Number	Description	Attachment	SLP in US \$
(L65, L85, L95) 7102125	76" Rotary Tiller.....		\$7,875.00

Part Number	Description	Dealer Installed Accessories - Order From Parts
-------------	-------------	---

For current Dealer Installed Accessories pricing, reference BobQuote or Dealer Parts Department.

7280548	Tiller Skid Shoes for all models..... (0.5 hour assembly time)	Parts	\$____
---------	---	-------	--------

Destination Charge/Fuel Surcharge
Refer to BobQuote or BobcatNET>>Other Resources>>Pricing Homepage for current Destination and Fuel Charges.

Attachment	Assembly Required	Installation Time (Hours)
Tiller.....	None.....	-
Tiller Skid Shoe.....	Bolt to tiller.....	0.50